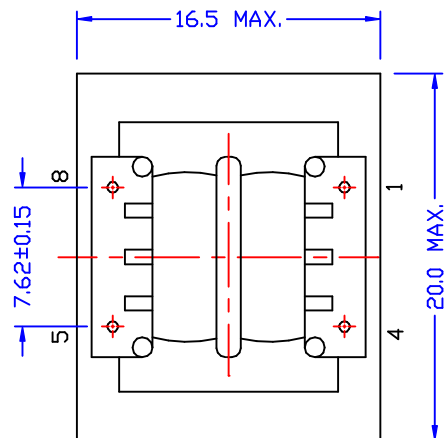
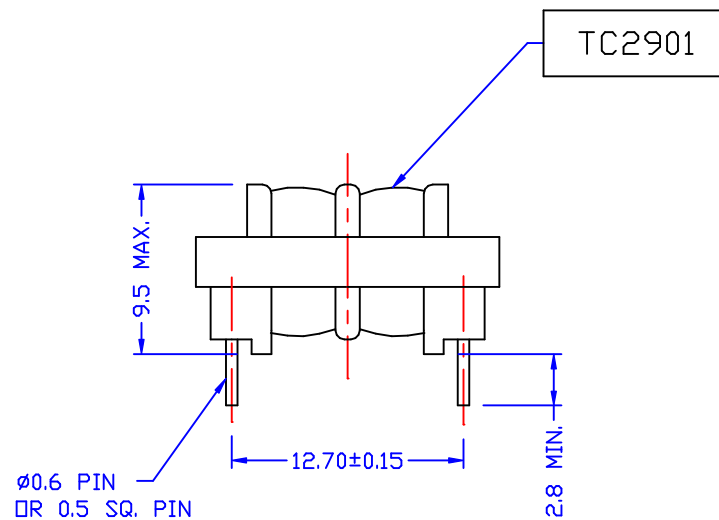


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-4 = 5-8 = 120 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-4 = 1.2Hy MIN.
3. INSERTION LOSS (@1KHZ, 0dBm 5-8 W/H 360 OHM) : PIN 1-4 = 2.5dB TYP.
4. FREQ. RESP. (@REF, 1KHZ) : @300HZ = $\pm$ 0.5dB
@4KHZ = $\pm$ 1dB
5. RETURN LOSS (REF, 600 OHM) : @300HZ-4KHZ = 25dB MIN.
6. TURN RATIO (@8KHZ, 1Vrms) : PIN 1-4 : PIN 8-5 = 1 $\pm$ 1%
7. HI-POT (@3750VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 600 : 360 TRANSFORMER	
								DWG. NO. ATS-378A	
	RELEASE	11/18/2002	DOLLY	SUEDY	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/18/02			DRAW <i>Pair</i>
REVISIONS									