

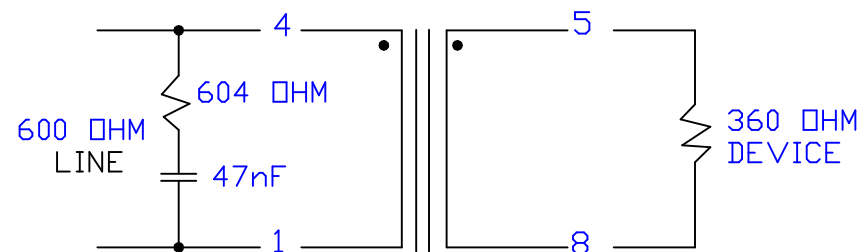


ATS-378
Atech

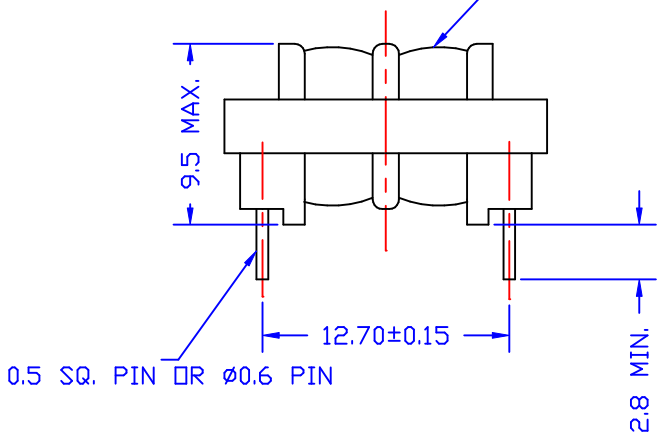

ELECTRICAL CHARACTERISTICS:

- 1 D.C.R : PIN1-4 = 5-8 = 120 OHM+/-12%
- 2 INDUCTANCE :(@1KHZ, 1Vrms) PIN 1-4 = 1.2H MIN.
- 3 INSERTION LOSS : (@1KHZ, 0dBm, PIN 5-8 W/H 360 OHM)
1-4 = 2.5dB TYP.
- 4 FREQ. RESP. : (REF. 1KHZ)@300HZ = +/-0.5dB
@4KHZ = +/- 1dB
- 5 RETURN LOSS : (REF. 600 OHM)@300-4KHZ = 25dB MIN.
- 6 TURN RATIO : (@8KHZ, 1Vrms) PIN 1-4 : PIN 8-5 = 1 +/-1%
- 7 HI-POT(@3750VAC,1mA, 2SEC) PRI.-SEC.
- 8 RoHS COMPLIANCE

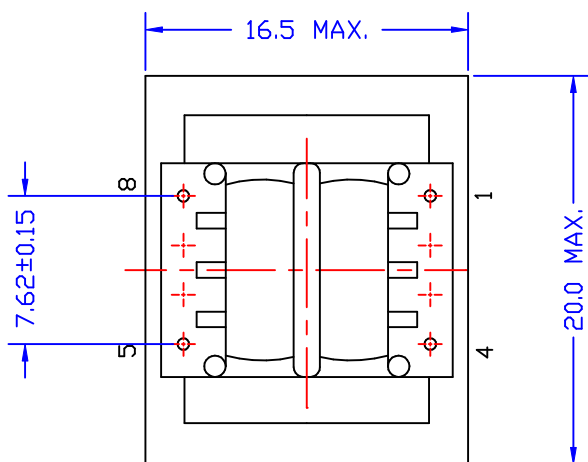

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600: 360 TRANSFORMER	
							DWG. NO. ATS-378R	
	RELEASE	12/06/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						12/06/05	SHEET 1 of 1	
							DRAW <i>Pair</i>	