

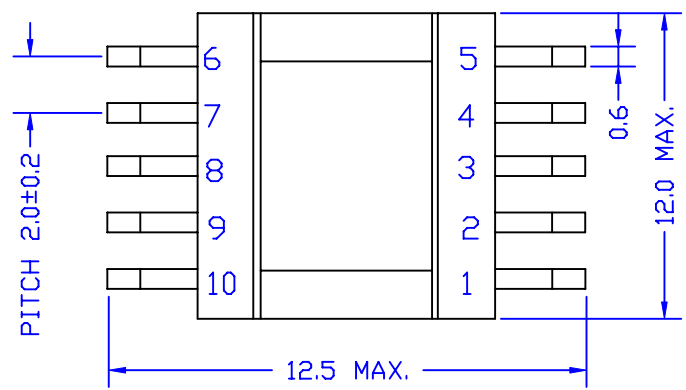



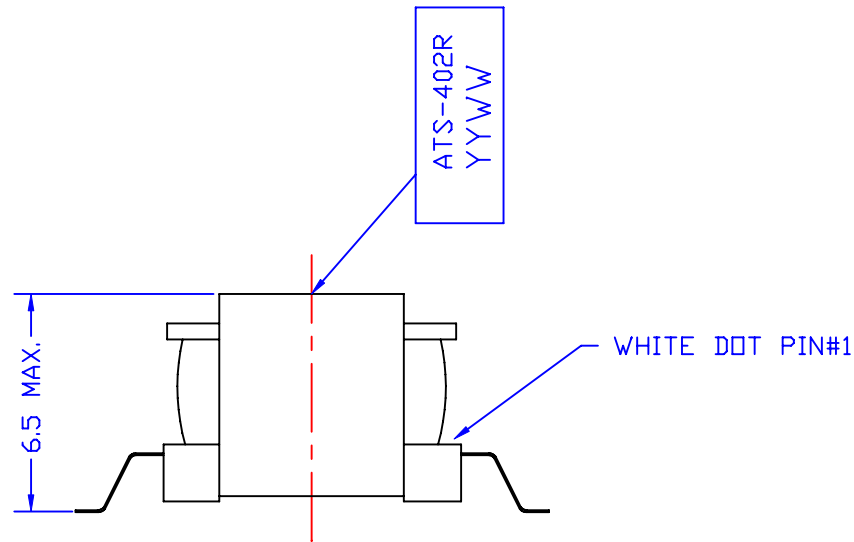

ELECTRICAL CHARACTERISTICS: (671-7126 COMPATIBLE)

1. D.C.R. : PIN 2-4 = 4.6 OHM +/- 13% PIN 9-10 = 1.775+/-12%
PIN 6-7 = 1.775 OHM +/- 12%
2. INDUCTANCE (@ 1 KHZ, 0.25 Vrms, W/H 55mADC) :
PIN 2-4 = 2.5 mH MIN.
3. TURN RATIO (@6KHZ, 1Vrms) :
PIN 2-4 = 6-7 = 3.33 +/- 1% PIN2-4 = 9-10 = 3.33+/-1%
4. HI-POT (@ 500 VAC, 1mA, 2SEC) PRI-SEC, PRI-CORE, SEC-CORE
5. RoHS COMPLIANT

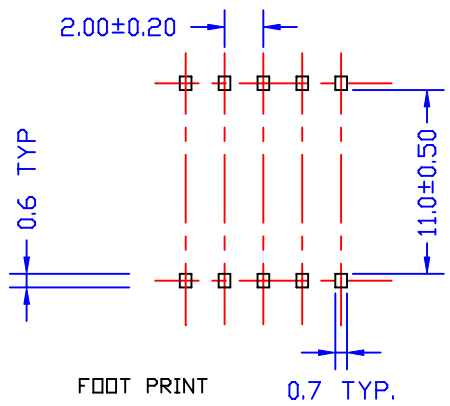

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-402R	
	RELEASE	12/08/2006	PAIR		SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						12/08/06			
								SHEET 1 OF 1	
								DRAW <i>Pair</i>	