

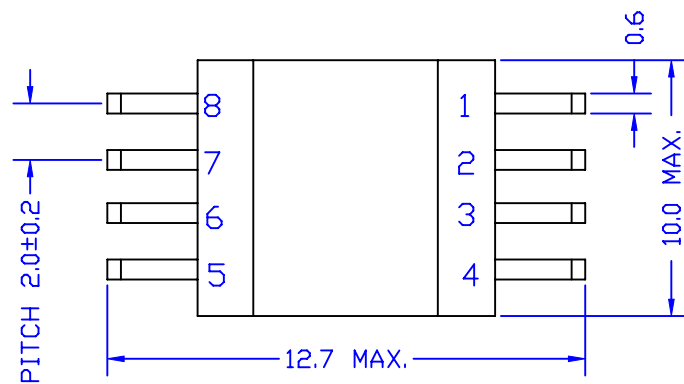
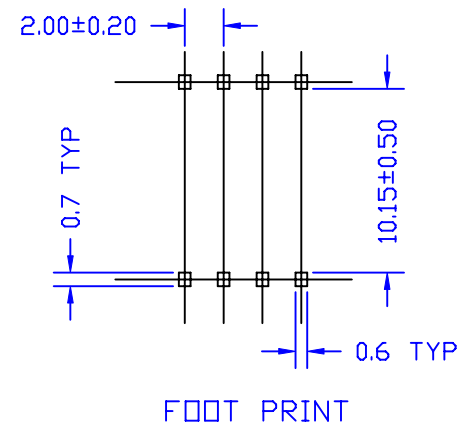


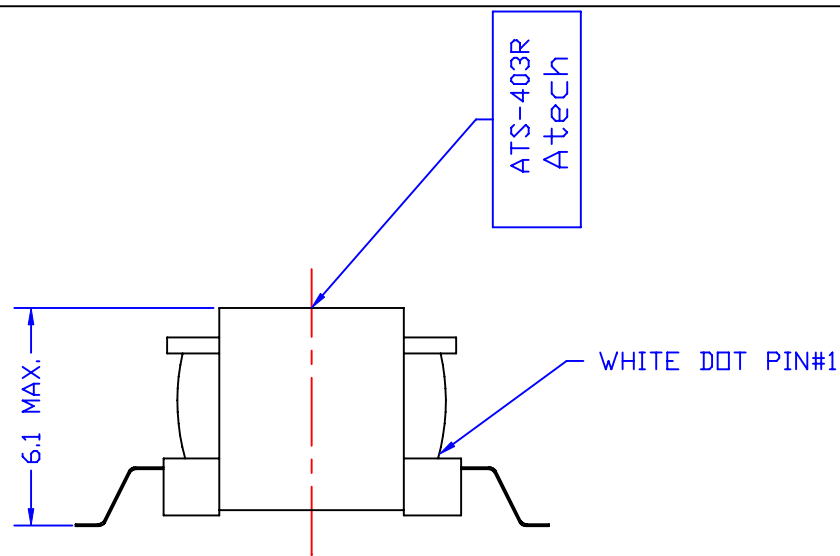

ELECTRICAL CHARACTERISTICS: (671-8234 COMPATIBLE)

1. D.C.R. : PIN 3-2 = 67.1 Ω M $\pm$ 6%
PIN 8-5 = 85.4 Ω M $\pm$ 6%
2. INDUCTANCE (@1KHZ, 0.1Vrms) PIN 3-2 = 500mH MIN.
3. INSERTION LOSS (@1KHZ, 0dBm, 5-8W/H 487 Ω M)
PIN 3-2 = 1.5dB MAX.
4. FREQ. RESP. (REF 1KHZ) @300 TO 4KHZ = $\pm$ 0.5dB
5. TURNS RATIO (@1KHZ, 1Vrms) PIN 3-2 : 8-5 = 1 $\pm$ 1%
6. HI-POT (@1250VAC, 1mA, 1SEC) PRI-SEC
7. RoHS COMPLIANT



						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 487 TRANSFORMER	
								DWG. NO. ATS-403R	
	RELEASE	12/08/2006	PAIR		SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						12/08/06		SHEET 1 OF 1	
								DRAW <i>Pair</i>	