
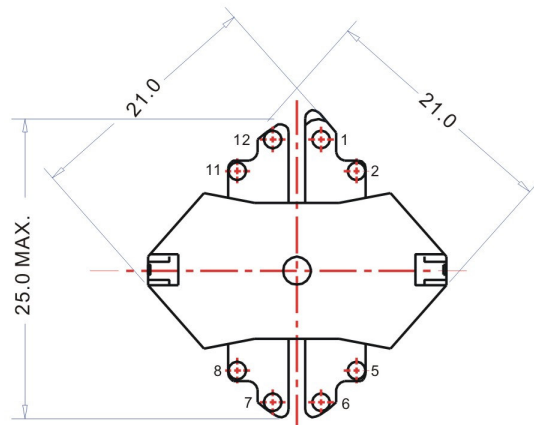
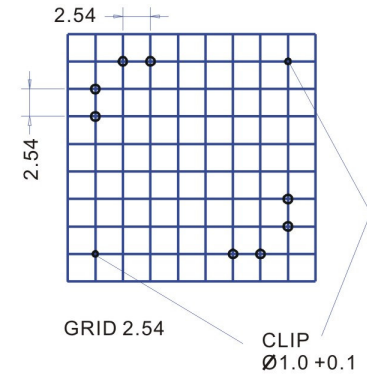
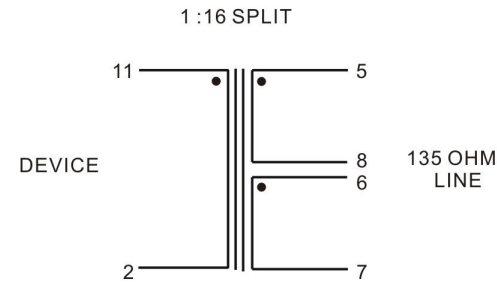


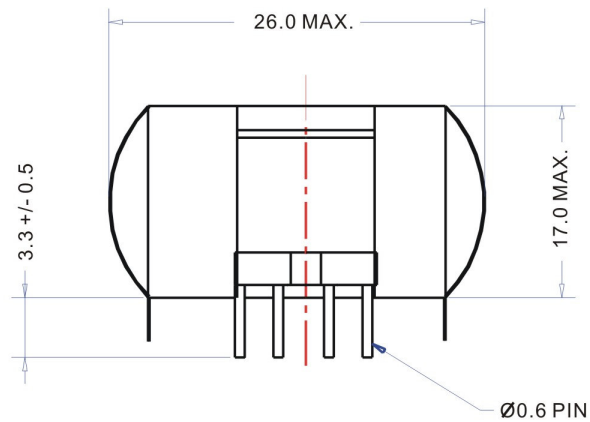

ELECTRICAL CHARACTERISTICS : (FOR SIEMENS 2091 ISDN "U" INTERFACE)

1.D.C.R. :PIN 2-11 = 2.8 OHM +/- 10%.

PIN 6-8 = 2.7 OHM +/- 10%(5-7 SHORT).

2.INDUCTANCE(@1K HZ , 50 mV , 6-8 SHORT , W / H 80 mADC) :

PIN 5-7 = 14.5 mH +/- 10%.

3.LEAKAGE INDUCTANCE(@100K HZ , 0.5 Vrms , 2-11 & 6-8 SHORT) :

PIN 5-7 = 90 uH MAX.

4.INTERWINDING CAP.(@100KHZ , 0.5 Vrms , 6-8 SHORT) :

PIN 5-11 = 75 pF MAX.

5.TURN RATIO(@1K HZ , 1V) :

5-8 : 6-7 = 1 +/- 1%.

5-7 : 11-2 = 1.58 +/- 1%(6-8 SHORT).

6.HI-POT(@2000 VAC , 1 mA , 2 SEC , W / H 6-8 SHORT) : 5-11.

7.RoHS COMPLIANT.

						Atech[®] Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004		TITLE ISDN U TRANSFORMER	
								DWG NO. ATS-406R	
	RELEASE	09/02 /2008	Isaac	JK	Eugene	UNITS M/M	SAFETY	SHEET 1 / 1	
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE 20080902		DRAW Isaac	
REVISIONS									