
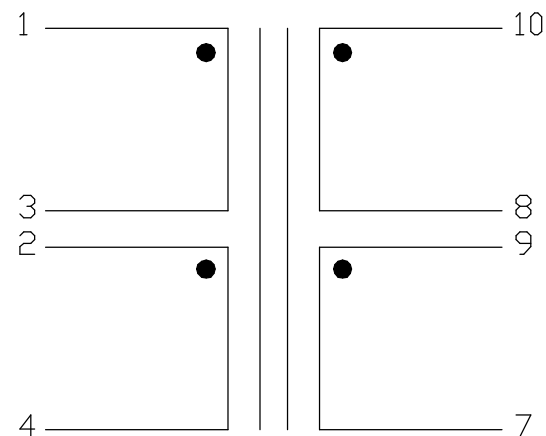
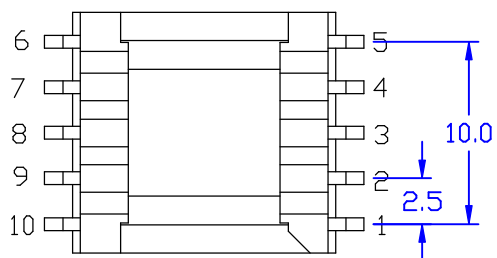



DOT PIN#1

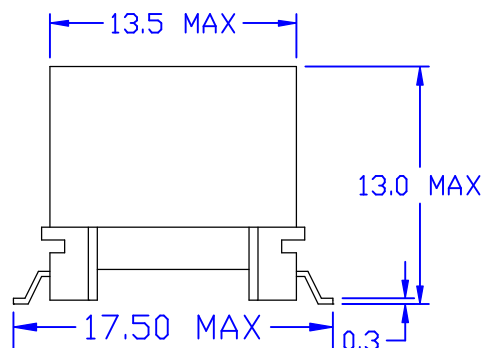

ELECTRICAL CHARACTERISTICS : <B2032 COMPATIBLE>

- DCR : PIN 1-3 = 1 OHM $\pm$ 10%
PIN 2-4 = 1.375 OHM $\pm$ 10%
PIN 9-7 = 10-8 = 1.19 OHM $\pm$ 10%
- INDUCTANCE : (<@10 KHZ, 1 Vrms, W/H 2-3 SHORT) 1-4 = 5 mH $\pm$ 10%
- LEAKAGE INDUCTANCE : (<@100 KHZ, 0.1 Vrms, W/H 2-3, 8-9, 10-7 SHORT)
1-4 = 15 uH MAX.
- INTERWINDING CAP. : (<@10 KHZ, 0.1 Vrms, W/H 2-3, 8-9 SHORT)
1-10 = 40 pF MAX.
- TURN RATIO : (<@10 KHZ, 1 Vrms) 10-7 (<8-9 SHORT) : 1-4 (<2-3 SHORT) = 1 $\pm$ 1%
- HI-POT : (<@1875 VAC, 1 mA, 2 SEC) 1-10 (<8-9, 2-3 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADLS TRANSFORMER		
							DWG. NO. ATS-424C		
	RELEASE	05/21 /2001	DOLLY		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						05/21/01			