
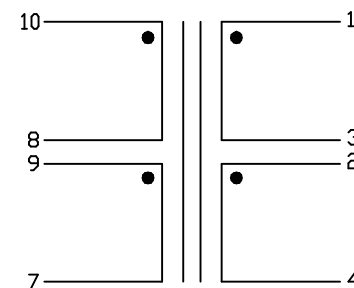
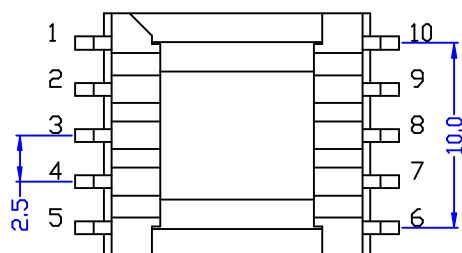
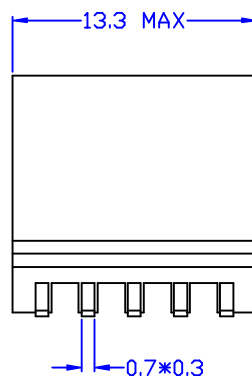


DOT PIN#1

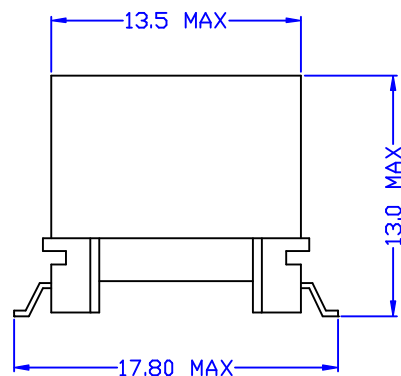

ELECTRICAL CHARACTERISTICS :

<TRTEP13S-U235B014 COMPATIBLE>

- DCR : PIN 1-3 = $1.48 \Omega \pm 12\%$
PIN 2-4 = $1.78 \Omega \pm 12\%$
PIN 7-9 = $1.63 \Omega \pm 12\%$
PIN 8-10 = $1.35 \Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 10-7 (<8-9 SHORT) = $5\text{mH} \pm 10\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-7 (<8-9, 1-3, 2-4 SHORT) = $15\mu\text{H MAX.}$
- THD (@100KHZ, 4Vrms) :
PIN 10-7 (<8-9, 2-3 SHORT, 1-4 W/H 100Ω) = -80dB MAX.
- TURN RATIO :
(@2KHZ, 1Vrms) PIN 10-7 : 1-4 (<8-9, 2-3 SHORT) = $1 \pm 1\%$
(@8KHZ, 1Vrms) PIN 10-8 : 1-3 = $1 \pm 1\%$
- HI-POT (@1500Vrms, 1mA, 60SEC) : PIN 1-10 (<2-3, 8-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-424E1	
	RELEASE	06/05/2003	RORY	KEVIN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/05/03			DRAW <i>Pair</i>
REVISIONS									