
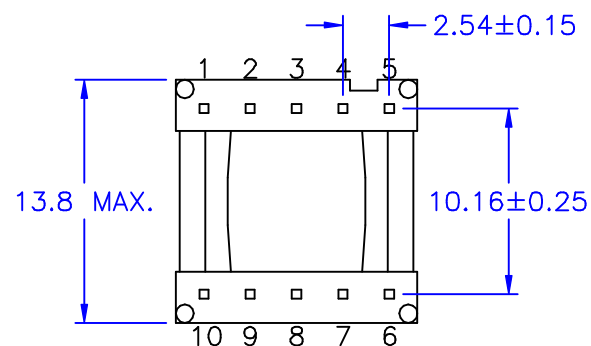
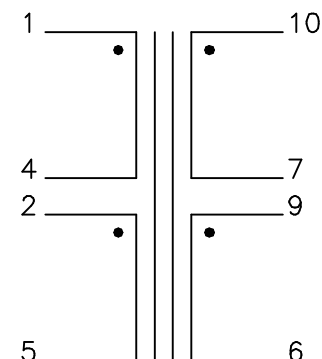



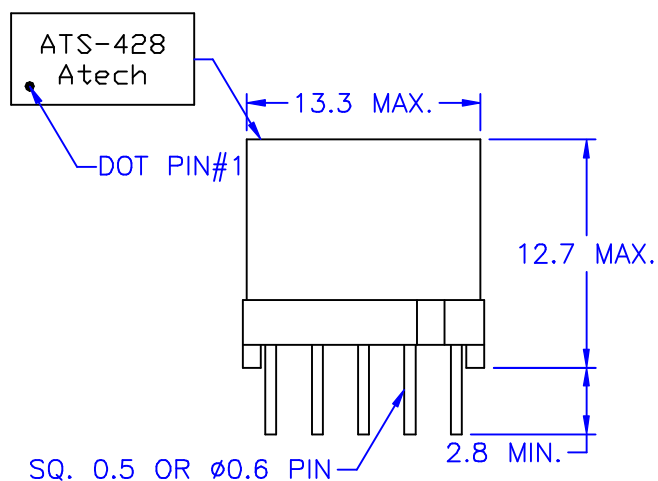

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 6-9 = 10-7 = 0.433 Ω HM $\pm$ 10%
PIN 5-2 = 4-1 = 0.126 Ω HM $\pm$ 10%
- INDUCTANCE (@10KHZ, 0.1Vrms, 7-9 SHORT) : 10-6 = 800uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms, 1-5, 7-9, 2-4 SHORT) :
10-6 = 15uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms, 2-4, 9-7 SHORT) :
1-10 = 30PF MAX.
- TURN RATIO (@4KHZ, 1Vrms, 2-4, 7-9 SHORT) : 10-6 : 1-5 = 3.3 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 1MIN, 2-4, 7-9 SHORT) : 1-10 1-CORE, 10-CORE

						Atech [®]		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-428B	
RELEASE		08/06/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						08/06/01		DRAW Pair	