
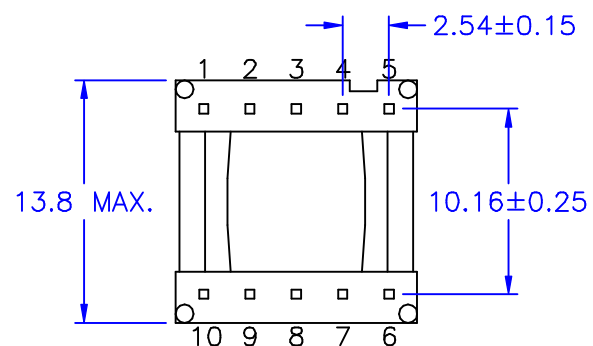
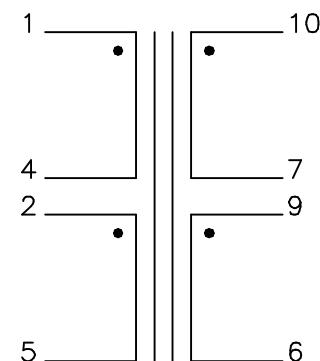



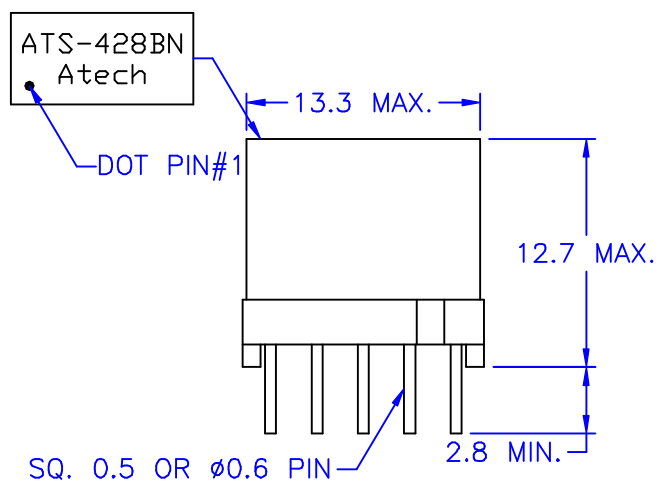

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 6-9 = 10-7 = $0.433 \Omega \text{HM} \pm 10\%$
PIN 5-2 = 4-1 = $0.126 \Omega \text{HM} \pm 10\%$
- INDUCTANCE (@10KHZ, 0.1Vrms, 7-9 SHORT) : 10-6 = $800\mu\text{H} \pm 5\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms, 1-5, 7-9, 2-4 SHORT) :
10-6 = $15\mu\text{H} \text{ MAX.}$
- INTERWINDING CAP. (@100KHZ, 0.1Vrms, 2-4, 9-7 SHORT) :
1-10 = $30\text{PF} \text{ MAX.}$
- TURN RATIO (@4KHZ, 1Vrms, 2-4, 7-9 SHORT) : 10-6 : 1-5 = $3.3 \pm 1\%$
- HI-POT (@1500VAC, 1mA, 1MIN, 2-4, 7-9 SHORT) : 1-10 1-CORE, 10-CORE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-428BN	
	RELEASE	05/27/2003	RORY	KEVIN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						05/27/03			Pair