
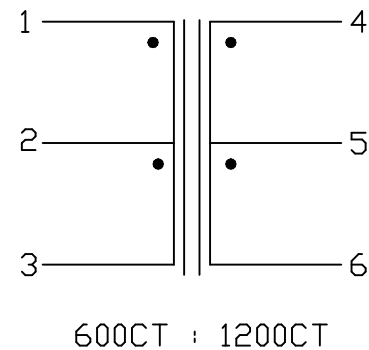
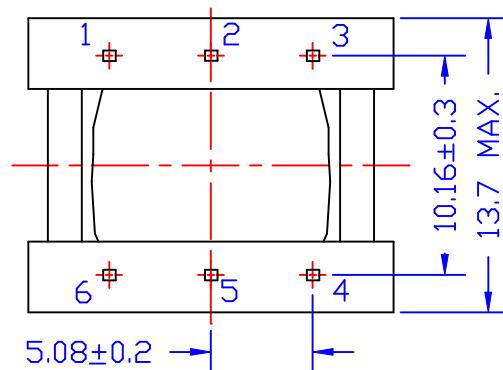


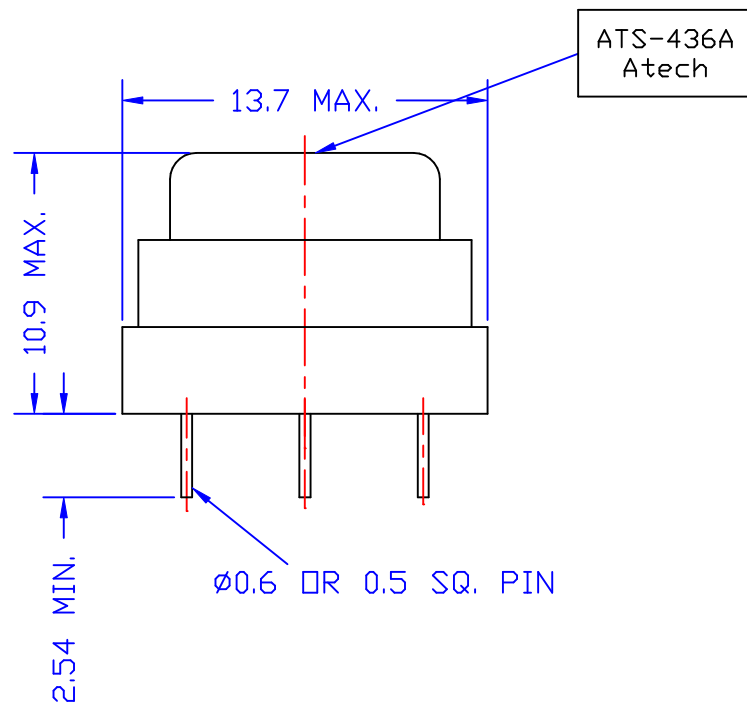

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 48 OHM $\pm$ 15% PIN 4-6 = 56 OHM $\pm$ 15%
2. INDUCTANCE : (@1KHZ, 1Vrms) 4-6 = 1.8 H MIN.
3. TURNS RATIO : (@12KHZ, 0.1Vrms) 4-6 : 1-3 = 1.47 $\pm$ 1%
4. INSERTION LOSS : (@1KHZ, 0.78Vrms, TRANSMIT TO LINE) 4 dB MAX.
5. FREQUENCY RESPONSE : (@300HZ, 0.78Vrms) $\pm$ 0.5 dB MAX.
(@3.4KHZ, 0.78Vrms) $\pm$ 0.5 dB MAX.
6. RETURN LOSS : (@1KHZ, 0.25Vrms) 26 dB MIN.
7. TRANS-HYBRID LOSS : (@300HZ) 30 dB MIN.
(@3.4KHZ) 30 dB MIN.
8. HI-POT : (@1250VAC, 1mA, 1SEC) PRI-SEC

						Atech®		TITLE 600CT: 1200CT TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-436A	
RELEASE		01/07/00	PAIR	SUEBY		UNITS:		SAFETY	
NO:		DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
REVISIONS						DATE		DRAW	
						01/07/00		Pair	