
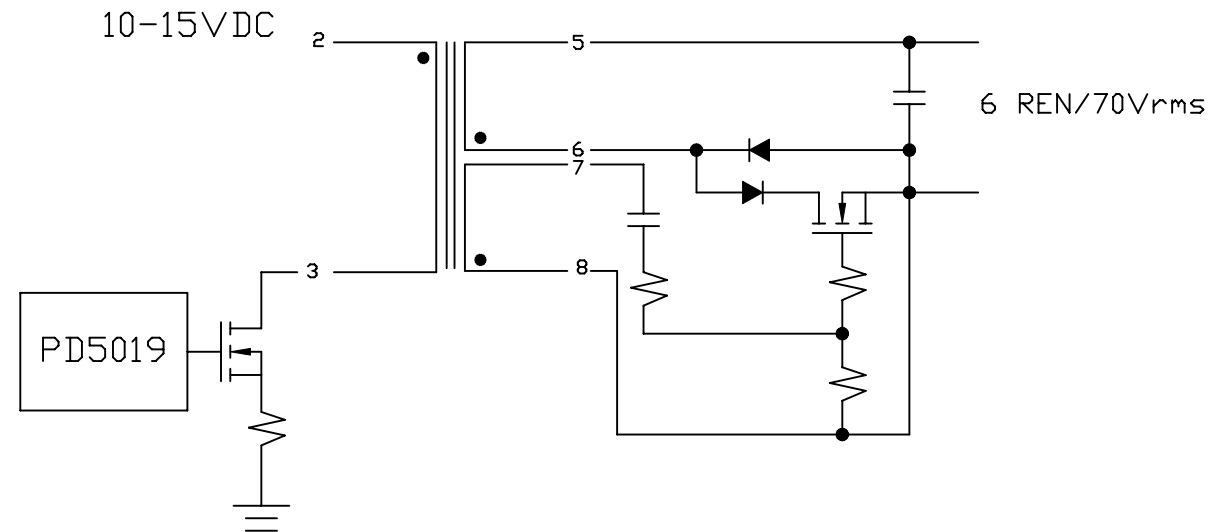


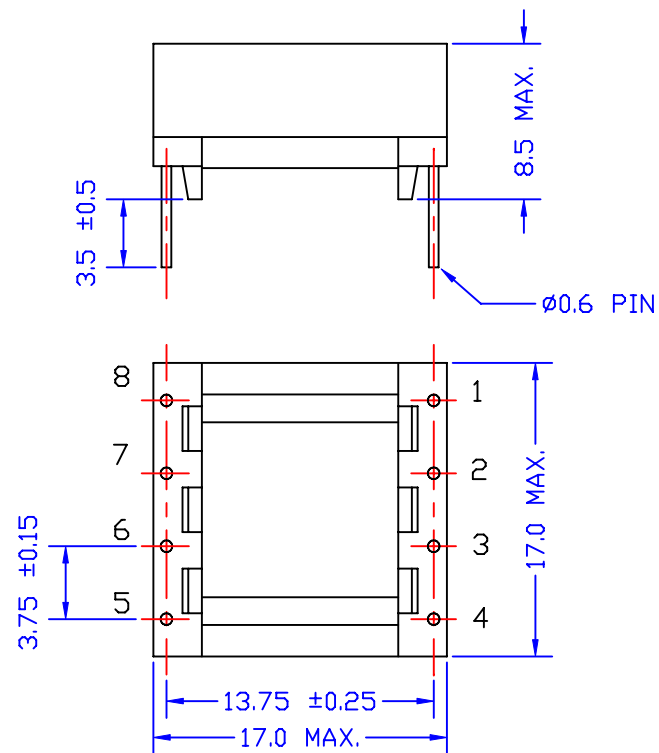

ELECTRICAL CHARACTERISTICS : (FOR PD5019 4W RINGER)

- DCR : PIN2-3 = 0.11 OHM MAX. PIN5-6 = 3.2 OHM MAX.
PIN7-8 = 0.85 OHM MAX.
- INDUCTANCE (@100KHZ, 0.1Vrms) : PIN2-3 = 95uH ±8%
- URNS PATIO (@50KHZ, 1Vrms) :
PIN6-5 : PIN2-3 = 3.94 ±1%
PIN6-5 : PIN8-7 = 5.4 ±1%
- HI-POT (@1250V, 1mA, 2SEC) 2-5, 2-7
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 7-8 (W/H 2-3 SHORT) = 1.1 uH MAX.

						Atech®		TITLE RINGER TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-439-1
A	ADD L/K	02/15/2005	BART	ANDY	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	05/31/00	PAIR		SUEDY	DATE	P/N:	DRAW
NO:	DESCRIPTION	DATE	BY	CHK	APPD	05/31/00	CTX115003A	Pair
REVISIONS								