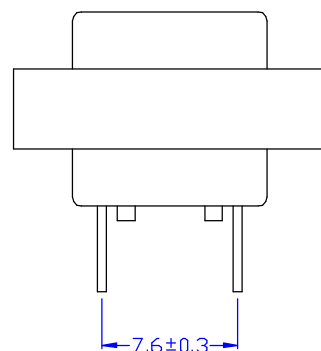
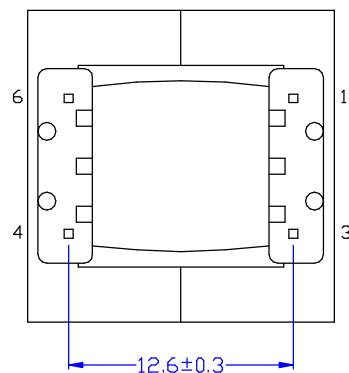
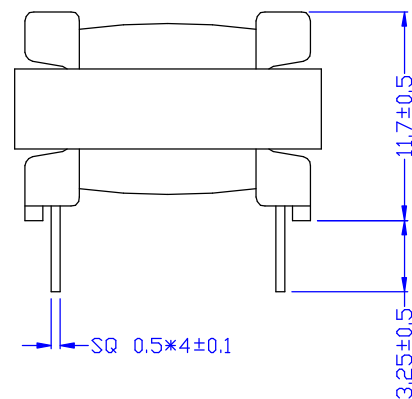
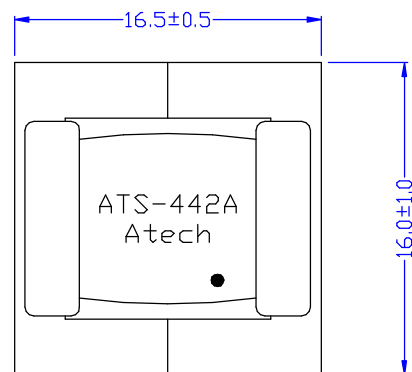


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 1.86 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 (3-4 SHORT) = 16mH $\pm$ 5%
PIN 1-3 = PIN 4-6 = 4mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 13.68mH MIN.
(@10KHZ, 1Vrms) : PIN 1-3 = PIN 4-6 = 3.92mH TYP.
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@100KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 2%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

						Atech[®] Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-442A	
	RELEASE	07/31/2003	RDRY	SIMON	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						07/31/03			