

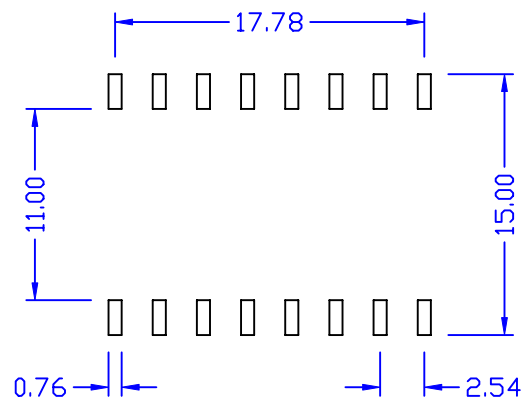
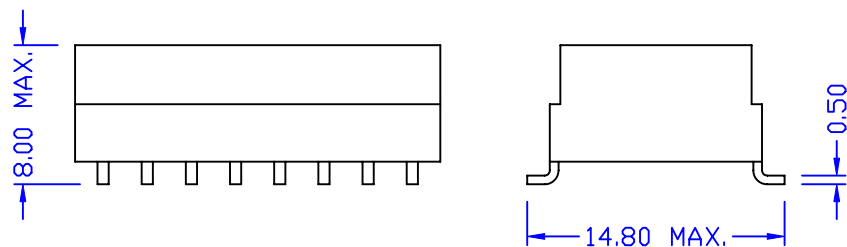


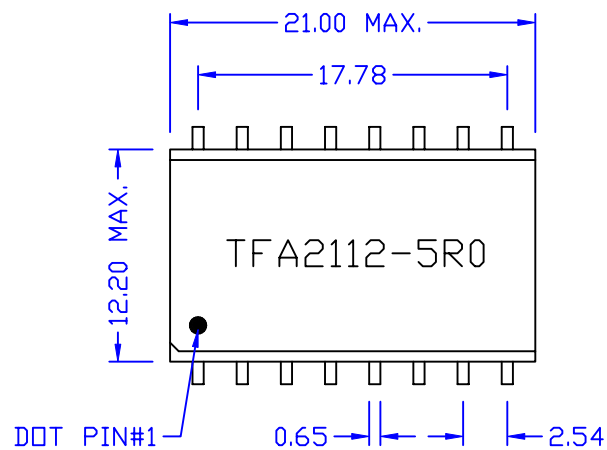

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

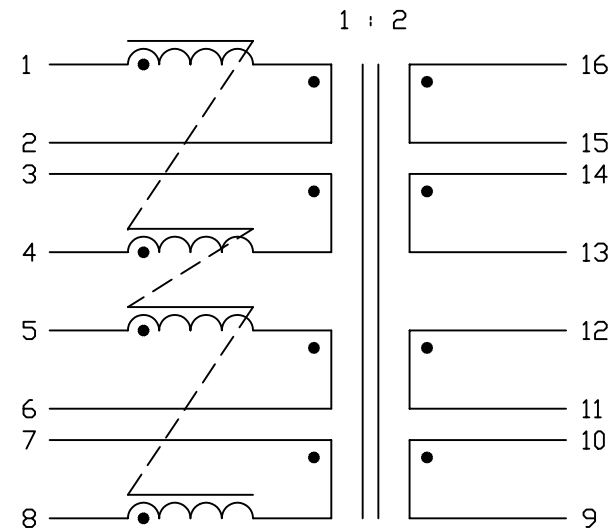

ELECTRICAL SPECIFICATIONS@25°C :

1. TURNS RATIO ($\pm 2\%$) :

PIN 1-4 (2-3 SHORT) : PIN 16-13 (14-15 SHORT)
PIN 5-8 (6-7 SHORT) : PIN 12-9 (11-10 SHORT)

2. OCL (10KHZ/0.1V) :

PIN 16-13 (15-14 SHORT) = 100mH MIN.
PIN 12-9 (11-10 SHORT) = 100mH MIN.

3. L.L (100KHZ/0.1V) :

PIN 1-4 (2-3 16-15 14-13 SHORT) = 5uH MAX.
PIN 5-8 (6-7 12-11 10-9 SHORT) = 5uH MAX.

4. CW/W (100KHZ/0.1V) :

PIN 1-16 (2-3 14-15 SHORT) = 130pF MAX.
PIN 5-12 (6-7 10-11 SHORT) = 130pF MAX.

5. HI-POT :

(1500VAC, 1mA, 2SEC) PRI-SEC

(200VAC, 1mA, 2SEC) PIN 1-3, 1-5, 1-7, 3-5, 3-7, 5-7
, 9-11, 9-13, 9-15, 11-13, 11-15, 13-15

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE	ISDN TRANSFORMER
A	MARKING/HI-POT	04/14/2005	BART	AL	SUEDY			DWG. NO.	ATS-450A1
	RELEASE	11/25/2004	BART	AL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW Pair	
REVISIONS						DATE	11/25/04		