

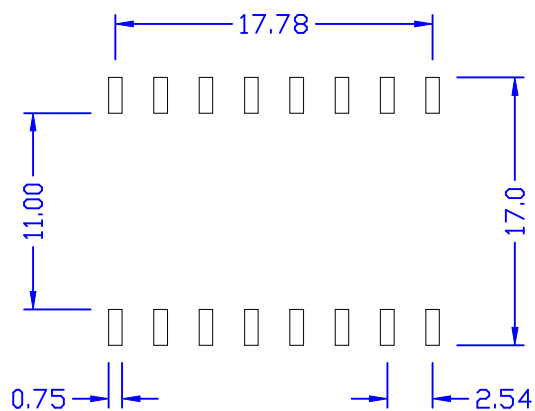
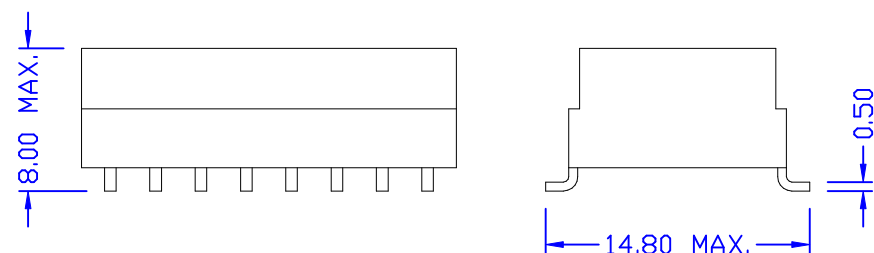


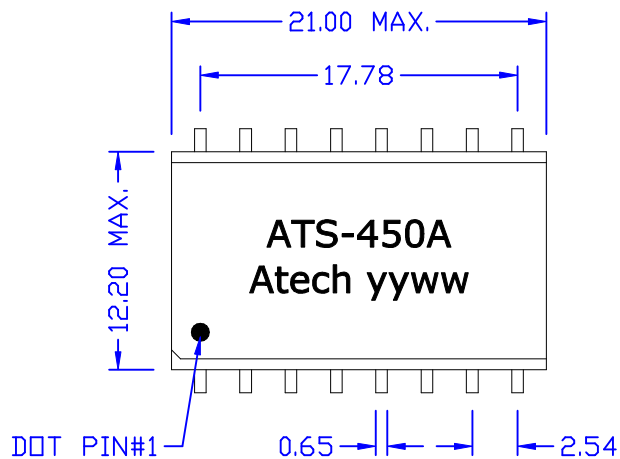

SUGGESTED PAD LAYOUT

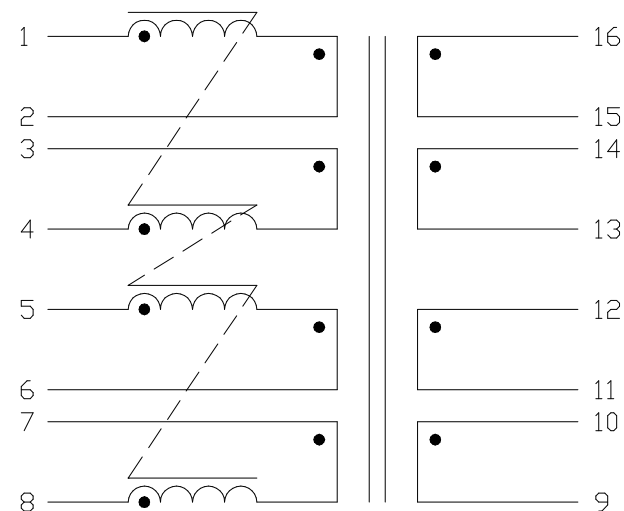

ELECTRICAL SPECIFICATIONS@25°C :

1. TURNS RATIO ($\pm 2\%$) :
PIN 1-4 (2-3 SHORT) : PIN 16-13 (14-15 SHORT) = 1:2
PIN 5-8 (6-7 SHORT) : PIN 12-9 (11-10 SHORT) = 1:2
2. OCL (10KHZ/0.1V) :
PIN 16-13 (15-14 SHORT) = 100mH MIN.
PIN 12-9 (11-10 SHORT) = 100mH MIN.
3. L.L (100KHZ/0.1V) :
PIN 1-4 (2-3 16-15 14-13 SHORT) = 5uH MAX.
PIN 5-8 (6-7 12-11 10-9 SHORT) = 5uH MAX.
4. CW/W (100KHZ/0.1V) :
PIN 1-16 (2-3 14-15 SHORT) = 130pF MAX.
PIN 5-12 (6-7 10-11 SHORT) = 130pF MAX.
5. RoHS COMPLIANCE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE ISDN SD TRANSFORMER	
								DWG. NO. ATS-450AR	
	RELEASE	12/26/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						12/26/05			Pair