
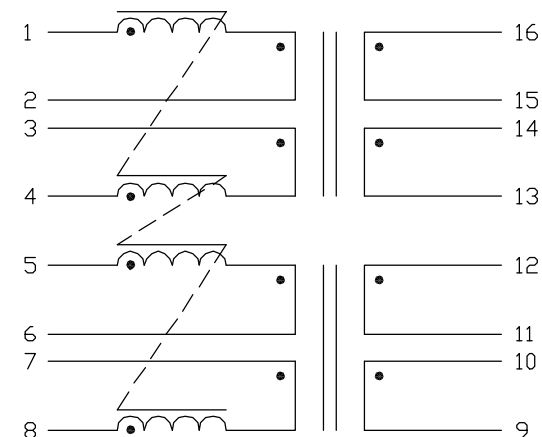


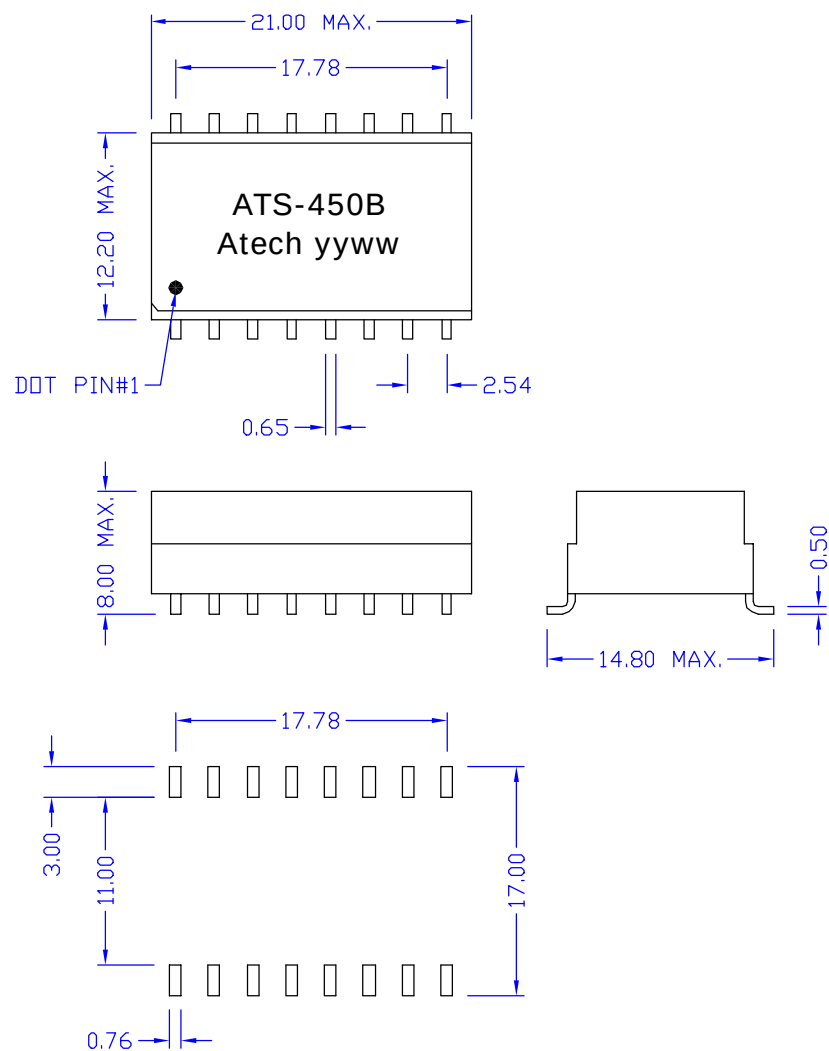

ELECTRICAL CHARACTERISTICS @25°C :

1. TURNS RATIO ($\pm 2\%$) :
PIN 1-4 (2-3 SHORT) : PIN 16-13 (14-15 SHORT) = 1 : 2.5
PIN 5-8 (6-7 SHORT) : PIN 12-9 (11-10 SHORT) = 1 : 2.5
2. DCL (10KHZ/0.1V) :
PIN 16-13 (15-14 SHORT) = 175mH MIN.
PIN 12-9 (11-10 SHORT) = 175mH MIN.
3. L.L (100KHZ/0.1V) :
PIN 1-4 (2-3 16-15 14-13 SHORT) = 3uH MAX.
PIN 5-8 (6-7 12-11 10-9 SHORT) = 3uH MAX.
4. CW/W (100KHZ/0.1V) :
PIN 1-16 (2-3 14-15 SHORT) = 100pF MAX.
PIN 5-12 (6-7 10-11 SHORT) = 100pF MAX.
5. LEAD-FREE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL 022794-6667 FAX 022794-8004		TITLE ISDN SO MODULE	
								DWG. NO. ATS-450BN	
	RELEASE	10/04/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/04/05		SHEET 1 OF 1	
REVISIONS								DRAW <i>Pair</i>	