
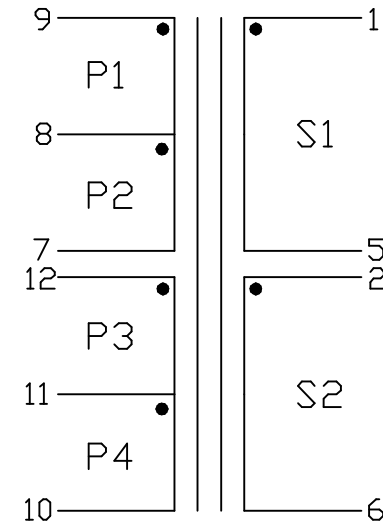
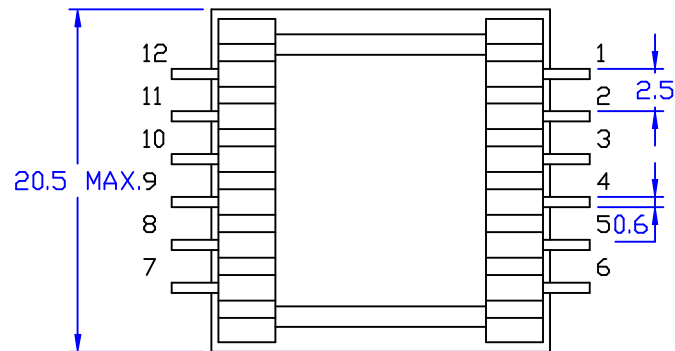


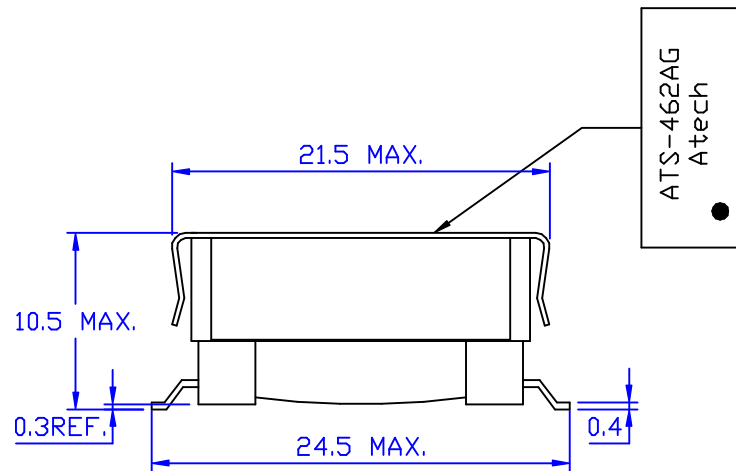

ELECTRICAL CHARACTERISTICS: <FOR U016B COMPATIBLE>

- D.C.R. : 1-5 = 2-6 = 550m Ω HM $\pm$ 15%
11-10 = 9-8 = 305m Ω HM $\pm$ 15%
12-11 = 8-7 = 245M Ω HM $\pm$ 15%
- INDUCTANCE : <@10KHZ, 0.1Vrms>
1-6 <W/H 2-5 SHORT> = 540uH $\pm$ 10%
- LEAKAGE INDUCTANCE : <@100KHZ, 0.1Vrms>
1-6 <W/H 2-5, 12-7, 9-10 SHORT> = 7uH MAX.
- TRUN RATIO : <@900 KHZ, 1Vrms>
1-5 : 12-10 = 1-5 : 9-7 = 1-5 : 2-6 = 1 $\pm$ 1%
- HI-POT <@1500VAC, 1mA, 1MIN> 1-9 <7-12, 2-5 SHORT>
- Cw<@100KHZ, 0.1Vrms> 1-9 <W/H 2-5, 7-12 SHORT> = 70 pF MAX.

						Atech®		TITLE ADSL
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
A	ADD FRAME	08/08/2001	DOLLY		SUEDY	UNITS:		ATS-462AG
	RELEASE	06/30/2001	DOLLY		SUEDY	M/M		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						06/30/01		Pair