
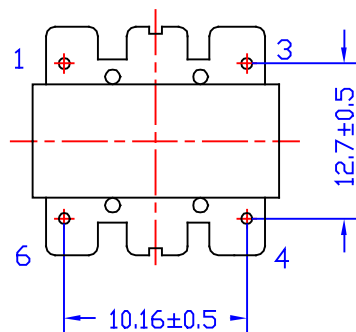

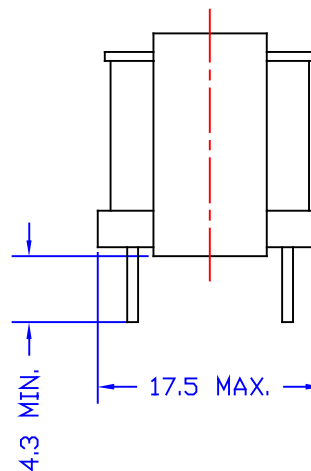


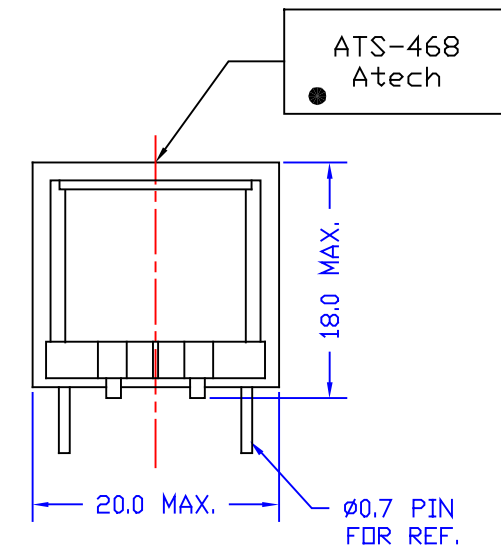

ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-3 = 585 OHM MAX. PIN 4-6 = 113 OHM MAX.
- 2 INDUCTANCE : (@1KHZ, 1Vrms) PIN 1-3 = 12.8H MIN.
- 3 IMPEDANCE : (@1KHZ,1Vrms) PIN 1-3 : 4-6 = 10K±10% : 2K
PIN 4-6 : 1-3 = 2K±10% : 10K
- 4 INSERTION LOSS : (@1KHZ,1Vrms) = 0.9dB MAX.
- 5 FREQ. RESP. : (REF, 10KHZ) (@300HZ = ±0.18dB) (@4KHZ=±0.15dB)
- 6 POLARITY : PIN 1-4.
- 7 HI-POT : (@1250VAC, 1mA, 1MIN) PIN 1-4.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 10K : 2K TRANSFORMER	
							DWG. NO. ATS-468	
	RELEASE	07/27/00	FENG		SUEDY	UNITS: M/M	SAFETY	SHEET1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						07/27/00		
								DRAW <i>Pair</i>