
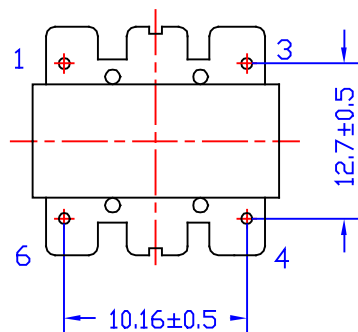

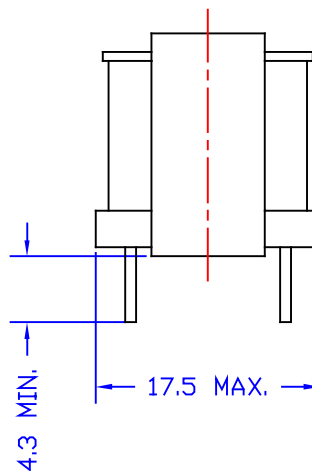


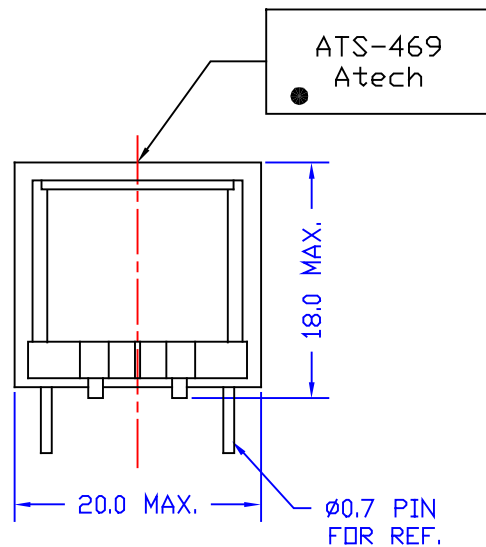

ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-3 = 45 OHM MAX. PIN 4-6 = 55 OHM MAX.
- 2 INDUCTANCE : (<@1KHZ, 1Vrms) PIN 1-3 = 1.3H MIN.
- 3 IMPEDANCE : (<@1KHZ,1Vrms) PIN 1-3 : 4-6 = 1K±10% : 1K
PIN 4-6 : 1-3 = 1K±10% : 1K
- 4 INSERTION LOSS : (<@1KHZ,1Vrms) = 0.9dB MAX.
- 5 FREQ. RESP. : (REF. 1KHZ) (<@300HZ = ±0.18dB) (<@4KHZ=±0.15dB)
- 6 POLARITY : PIN 1-4.
- 7 HI-POT : (<@1250VAC, 1mA, 1MIN) PIN 1-4.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 1K : 1K TRANSFORMER	
								DWG. NO. ATS-469	
	RELEASE	07/27/00	FENG		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						07/27/00			