
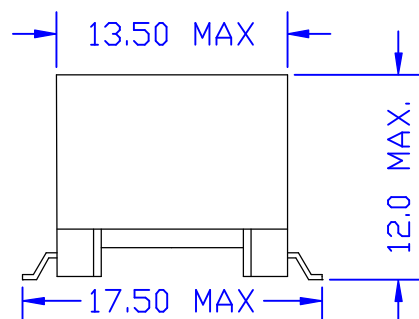


DOT PIN#1

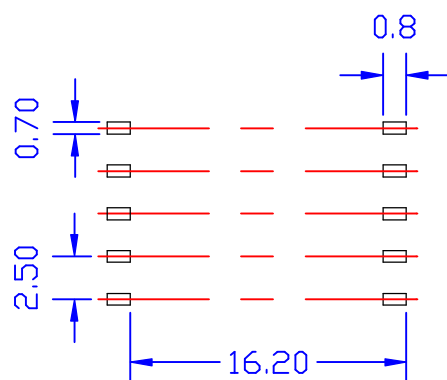

ELECTRICAL CHARACTERISTICS : <FOR GLOBESPAN/ITEX CHIPSET>

1. D.R.C. : 1-4=2-5=0.58 Ω M $\pm$ 12% 10-7=9-6=0.59 Ω M $\pm$ 12%
2. INDUCTANCE : <@10KHZ, 0.1Vrms, W/H 2-4 SHORT> 1-5=430 μ H $\pm$ 5%
3. LEAKAGE INDUCTANCE : <@100KHZ, 0.1Vrms, 2-4, 7-9, 10-6 SHORT> 1-5=10 μ H MAX.
4. TURN RATIO : <@100KHZ, 0.1Vrms, 2-4, 9-7 SHORT> 1-5:10-6=1 $\pm$ 1%
5. HI-POT : <@1875VAC, 1mA, 1SEC> PRI-SEC
6. Cw<@10KHZ, 0.1Vrms, 2-4 , 7-9 SHORT> 1-10 = 40pF MAX.

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER	
B	MARKING	02/22/01	PAIR		SUEDY		DWG. NO. ATS-471	
A	D.C.R. , Cw	11/06/00	PAIR		SUEDY			
	RELEASE	02/22/01			SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/22/01		DRAW <i>Pair</i>
REVISIONS								