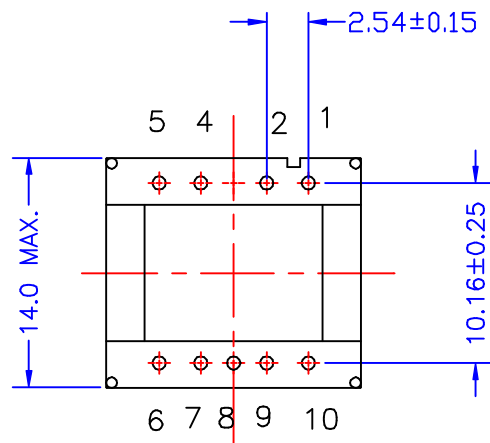
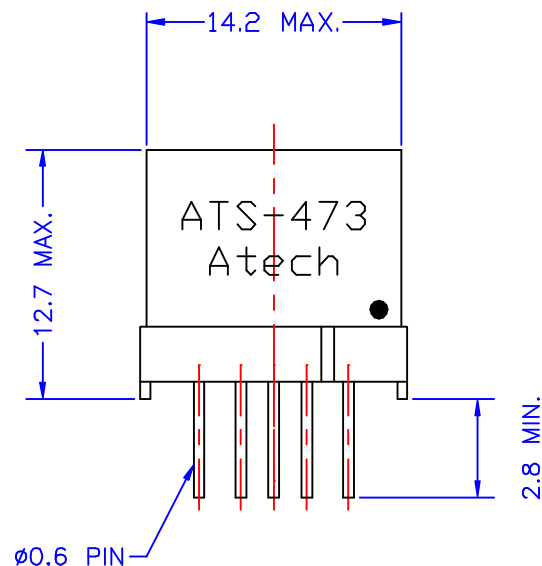


ELECTRICAL CHARACTERISTICS:(50494 COMPATIBLE)

1. D.C.R. : 1-4=2-5=1.5 OHM±10%. 10-7=9-6=1.45 OHM±10%.
2. INDUCTANCE : (@10KHZ, 1Vrms) 1-5(W/H 2-4 SHORT)=1.4 mH±5%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms)
1-5(W/H 2-4, 7-9, 6-10 SHORT)=14 uH MAX.
4. INTERWINDING CAP. : (@10KHZ,1Vrms) 1-10(W/H 2-4, 7-9 SHORT)=75pF MAX.
5. INSERTION LOSS : (@50KHZ, 0 dBm) 1-5(W/H 2-4, 7-9 SHORT)=0.5 dB MAX.
6. FREQUENCY RESPONSE : (@REF 50KHZ) 25KHZ~1MHZ=±0.7dB
7. TURN RATIO : (@8KHZ, 1Vrms) 10-7:1-4=1±1%
10-6(7-9 SHORT):1-5(2-4 SHORT)=1±1%
8. HI-POT : (@1875VAC, 1mA, 1SEC.) 1-10(2-4, 7-9 SHORT)

						Atech® Atech Technology Co.. Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-473	
	RELEASE	10/03/00			SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1
REVISIONS						10/03/00		DRAW <i>Pair</i>