
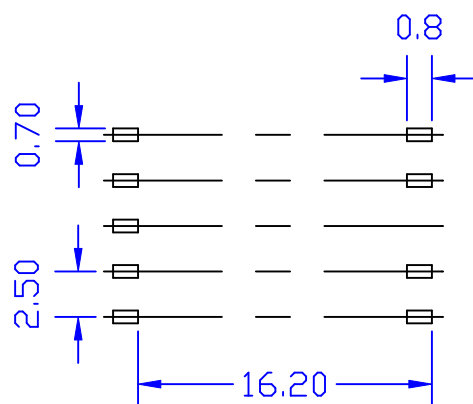
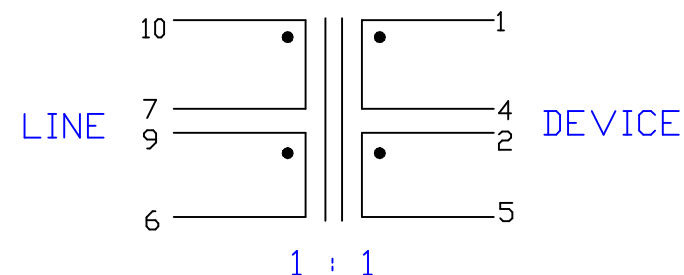
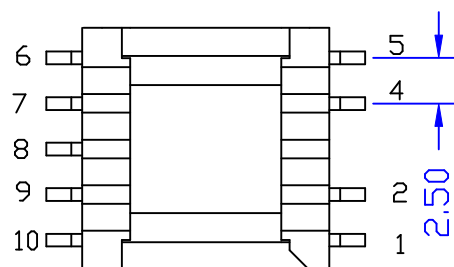
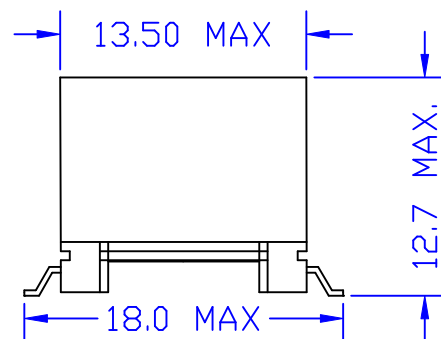


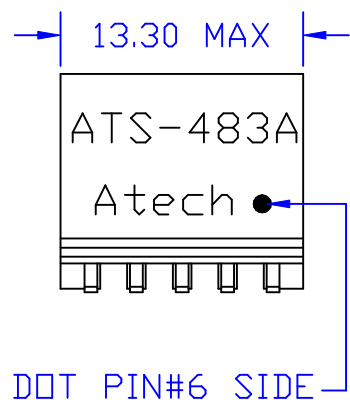

ELECTRICAL CHARACTERISTICS: (FOR 2776C COMPATIBLE, MEET IEC950)

1. D.C.R. : PIN 1-5(2-4 SHORT)= 1.3 OHM MAX. PIN 6-10(7-9 SHORT)= 1.1 OHM MAX.
2. INDUCTANCE : (@1KHZ, 0.1Vrms) PIN 6-10(7-9 SHORT)= 23mH MIN.
3. LEAKGE INDUCTANCE : (@1KHZ, 0.1Vrms) PIN 6-10(7-9,2-4,1-5 SHORT)= 12uH MAX.
4. TURNS RATIO : (@15KHZ, 1Vrms) 1-5 : 10-6 = 1±1% (W/H 2-4,7-9 SHORT)
5. HI-POT (@ 1875 VAC, 1mA, 2SEC) 10-1(2-4,7-9 SHORT)
6. RoHS COMPLIANCE

						Atech[®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE HDSL TRANSFORMER	
							DWG. NO. ATS-483AR	
	RELEASE	04/07/2006	PAIR		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						04/07/06	P/N: CTX413004A	
							DRAW <i>Pair</i>	