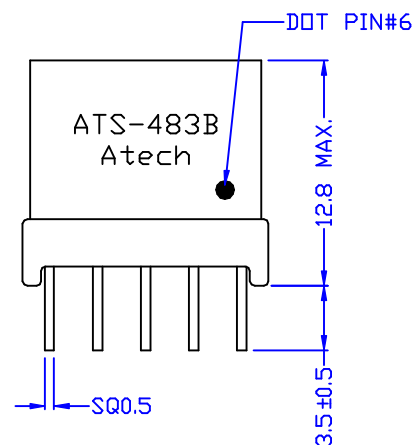



ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 0.98 OHM $\pm$ 12%
PIN 9-7 = 0.138 OHM $\pm$ 12%
PIN 10-6 = 0.91 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 3mH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (2-4 7-9 SHORT) = 15uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) : PIN 1-9 (2-4 SHORT) = 50pF MAX.
- TURN RATIO (@15KHZ, 1Vrms) : PIN 1-5 (2-4 SHORT) : PIN 9-7 = 4.25 $\pm$ 1.5%
PIN 1-5 (2-4 SHORT) : PIN 10-6 = 2.5 $\pm$ 3%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-10 (2-4 6-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-483B	
	RELEASE	03/28/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						03/28/02			
								DRAW	Pair