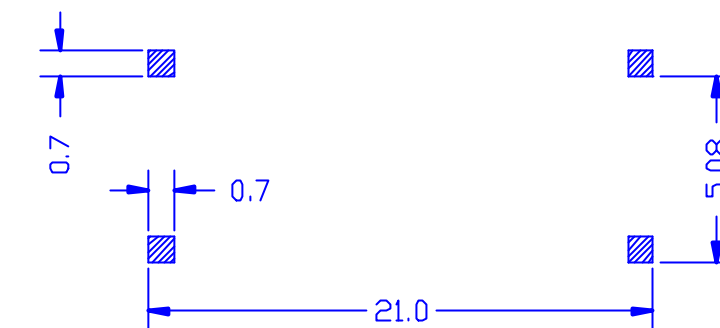


1. D.C.R. : PIN 1-2 = 163 OHM $\pm$ 12% PIN 3-4 = 197 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 3.5Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 240 OHM)
PIN 1-2 = 4.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = $\pm$ 0.15dB
5. RETURN LOSS (REF. 600 OHM) : @ 200HZ - 4KHZ = 28dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1 $\pm$ 2%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D. (@600HZ, -10dBm) = -80dB TYP.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

						 Atech Technology Co., Ltd. TEL(02)2784-8667 FAX(02)2784-8004	TITLE 600 : 240 TRANSFORMER	
							DWG. NO. ATS-485	
	RELEASE	11/20/00	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/20/00		DRAW <i>Pair</i>
REVISIONS								