
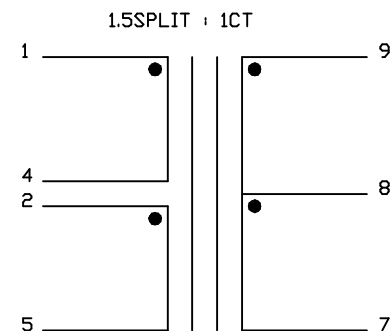
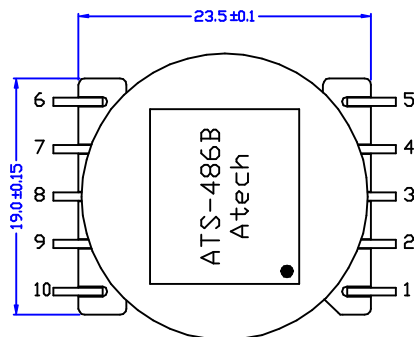


ELECTRICAL CHARACTERISTICS : <FOR T4004 COMPATIBLE>

1. DCR : PIN 1-5 (2-4 SHORT) = 20 OHM MAX.
PIN 7-9 = 3 OHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 27.3mH ± 6%
(@60mADC) = 27.3mH ± 6%
3. TURN RATIO (@84KHZ, 1Vrms) : PIN 1-5 (2-4 SHORT) : PIN 9-7 = 1.5 ± 3%
4. HI-POT (@2000VAC, 1mA, 2SEC) : PRI-SEC

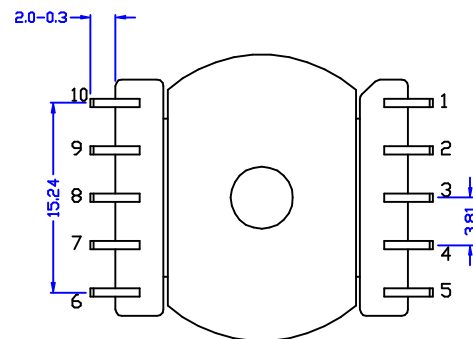

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8804	TITLE ISDN TRANSFORMER	
							DWG. NO. ATS-486B	
	RELEASE	01/05/2002	DOLLY	JEFF	SUE DY	UNITS: M/M	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						01/05/02		