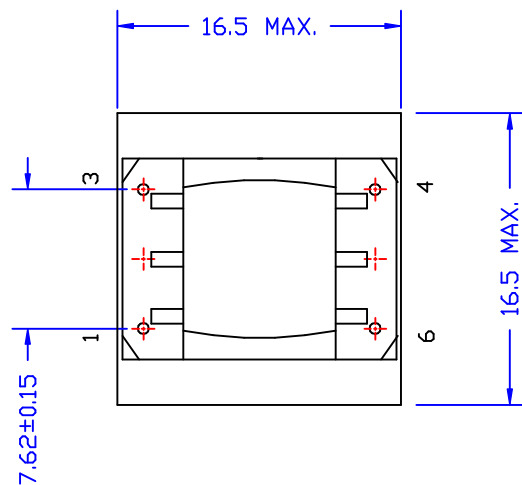
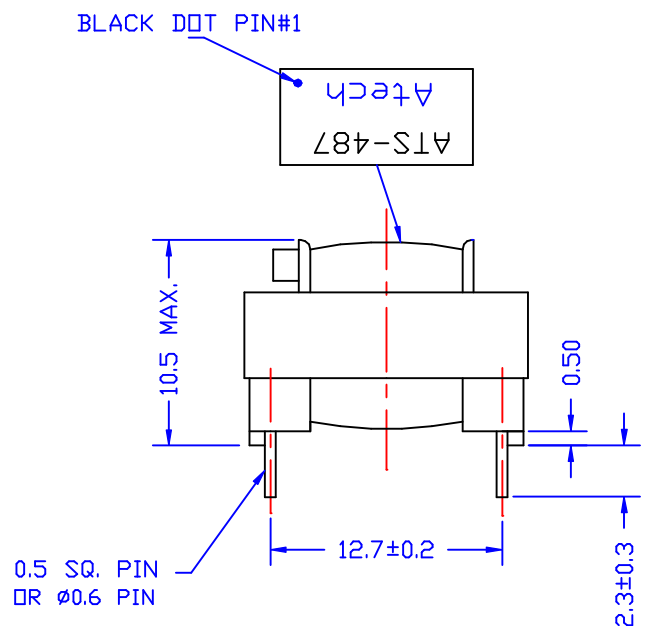


ELECTRICAL CHARACTERISTICS : (FOR HPR-6490 COMPATIBLE)

1. D.C.R. : PIN 1-3 = 131.5 OHM+/-10% PIN 6-4 = 129 OHM+/-10%
2. RETURN LOSS : (REF. 600 OHM) 300 TO 3.5KHZ = 25dB MIN.
1KHZ = 35dB TYP.
3. INSERTION LOSS : (@1KHZ,0dBm) PIN 1-3 = 2.9dB MAX.
4. FREQ. RESPONSE: (REF. 1KHZ) 300 TO 4KHZ = +/-0.25dB
5. LONGITUDINAL BALANCE : 200HZ-1KHZ = 60dB MIN.
1KHZ-4KHZ = 40dB MIN.
6. TURN RATIO : (1KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1+/-2%
7. DISTORTION : (@600HZ, -10dBm) = -76dB MAX.

8. HI-POT : (@1500VAC, 1mA, 1SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 332 TRANSFORMER	
								DWG. NO. ATS-487	
	RELEASE	12/11/00	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						12/11/00			