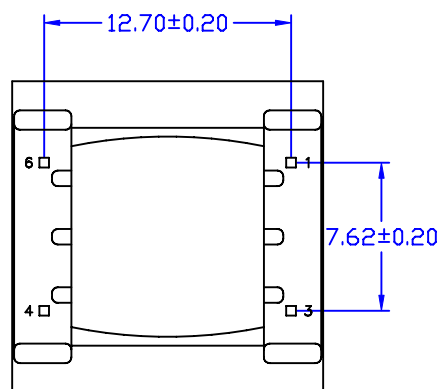
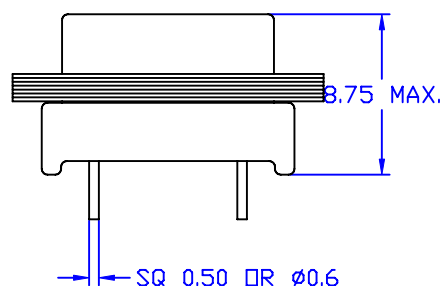
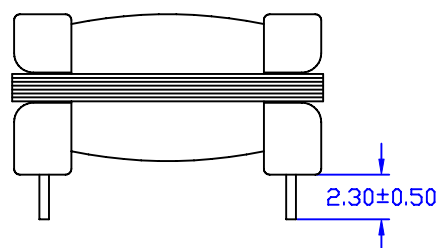
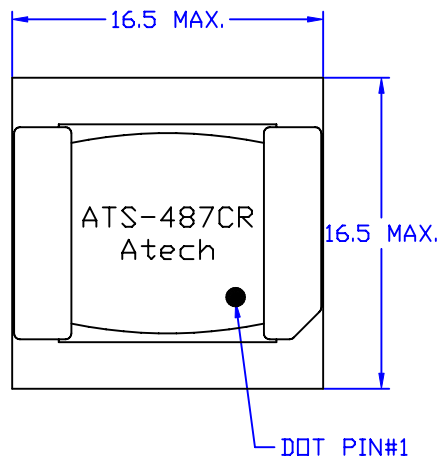


ELECTRICAL CHARACTERISTICS : (FOR HPR-6490 COMPATIBLE)

1. D.C.R. : PIN 1-3 = 131.5 OHM+/-10% PIN 6-4 = 129 OHM+/-10%
2. INDUCTANCE : (@1KHZ, 0.1Vrms) PIN 1-3 = 2.5H MIN.
3. IMPEDANCE : (@1KHZ, 0.1Vrms)
PIN 1-3 (PIN 4-6 W/H 332 OHM) = 600 OHM±10%
4. RETURN LOSS : (1-3 W/H 600 OHM, 4-6 W/H 332 OHM)
300 TO 1 KHZ = 25dB MIN.
3.5 KHZ = 20dB MIN.
5. INSERTION LOSS : (@1KHZ, 0dBm) PIN 1-3 = 2.9dB MAX.
6. FREQ. RESPONSE: (REF. 1KHZ) 300 TO 4KHZ = +/-0.25dB
7. LONGITUDINAL BALANCE : 200HZ-1KHZ = 60dB MIN.
1KHZ-4KHZ = 40dB MIN.
8. T.H.D. : (@600HZ, -10dBm) = -76dB MAX.
9. TURN RATIO : (1KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1+/-2%
10. HI-POT : (@1500VAC, 1mA, 1SEC) PRI-SEC
11. RoHS COMPLIANT

						Atech®		TITLE 600 : 332 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-487CR	
						TEL: (02) 2794-6667 FAX: (02) 2794-8004			
RELEASE		03/03/2008	PAIR	Vincent	SUEDY	UNITS: M/M		SAFETY	
NO: DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/03/08		DRAW Pair	