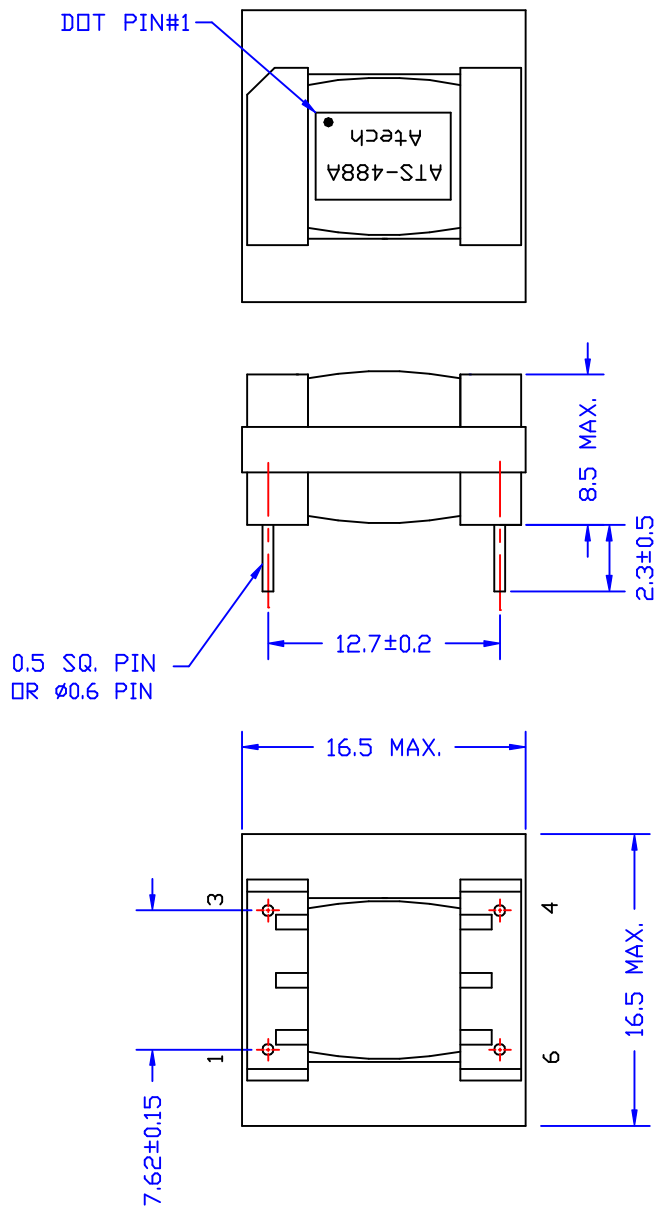


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = $33.43 \Omega \pm 12\%$ 6-4 = $30.08 \Omega \pm 12\%$
2. INDUCTANCE : (@300HZ, 1Vrms, PARALLEL) : PIN 1-3 = $4.59H \pm 40\%$
3. IMPEDANCE : (@300HZ, 0dBm, 6-4W/H 600 Ω M) 1-3 = $600 \Omega \pm 5\%$
4. FREQ. RESP. : (@REF 1KHZ) (@300HZ) = $\pm 0.35dB$, (@4KHZ) = $\pm 0.35dB$
5. RETURN LOSS : (@REF. 600 Ω M) (@300 HZ) = $28.37dB \pm 20\%$
 (@1KHZ) = $29.05dB \pm 20\%$
 (@4KHZ) = $26.67dB \pm 20\%$
6. TURN RATIO : (15KHZ, 1Vrms) PIN 1-3 : 6-4 = $1 \pm 1\%$
7. HI-POT : (@1200VAC, 1mA, 2MIN) 1-6

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 600 TRANSFORMER	
								DWG. NO. ATS-488A	
	RELEASE	04/01/2003	RDRY	SIMON	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						04/01/03			
								DRAW	Pair