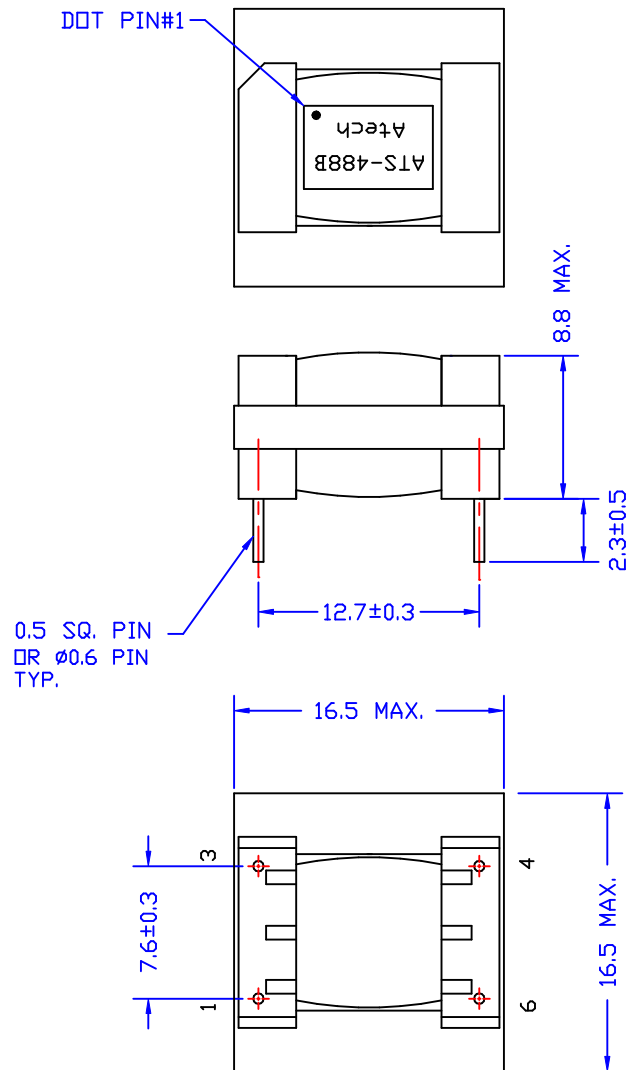


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-3 = 23 Ω HM $\pm 15\%$.
PIN 4-6 = 26 Ω HM $\pm 15\%$.
- INDUCTANCE PARALLEL (@300HZ, 1Vrms) :
PIN 1-3 = 1.5 H MIN.
- IMPEDANCE (@1KHZ, 1Vrms, PIN 6-4 W/H 600 Ω HM LOAD) :
PIN 1-3 = 600 Ω HM $\pm 5\%$.
- TURN RATIO (@10KHZ, 1Vrms) :
PIN 6-4:1-3 = 1 $\pm 1\%$.
- INSERTION LOSS (@1KHZ, 0dBm) : 1.0 dB MAX.
- FREQUENCY RESP. (@300HZ~4KHZ) : ± 0.35 dB MAX.
- RETURN RATIO : 300HZ = 19 dB MIN.
1KHZ = 22.0 dB MIN.
4KHZ = 23.0 dB MIN.
- HI-POT (@1875VAC, 1mA, 2S) : PRI-SEC

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-8867 FAX:(02)2794-8004		DWG. NO.
								ATS-488B
RELEASE		10/29/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
ND DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	10/29/04	DRAW Pair