
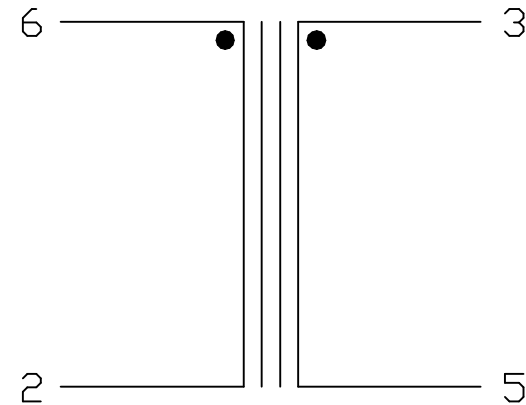
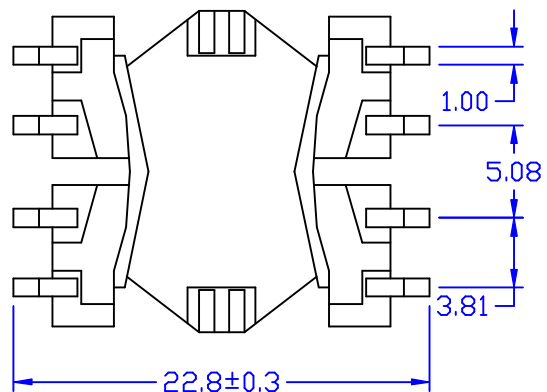
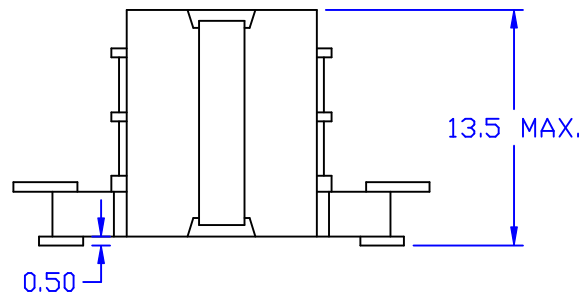


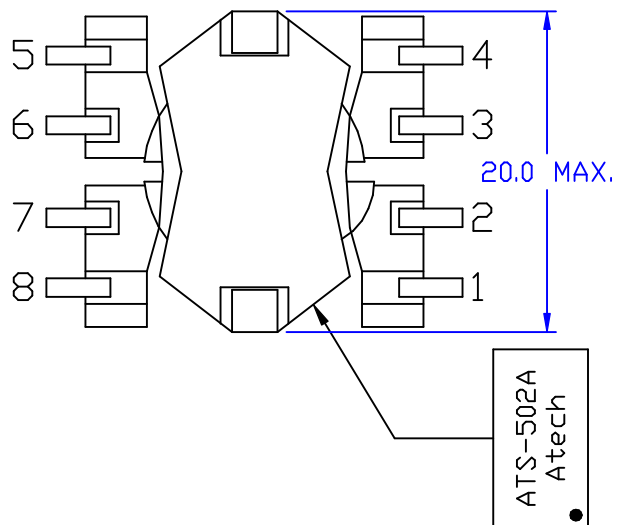

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 6-2 = 3-5 = 3.53 OHM MAX.
2. INDUCTANCE : (@1KHZ, 1Vrms) 6-5 (2-3 SHORT) = 24 mH $\pm$ 5%
(@100mADC) 6-5 (2-3 SHORT) = 21.6 mH MIN.
3. TURN RATIO : (@100KHZ, 1Vrms) 6-2 : 3-5 = 1 $\pm$ 1%
4. HI-POT : (@500VAC, 1mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE INDUCTOR FOR SPLITTER	
								DWG. NO.	
								ATS-502A	
	RELEASE	07/16/2001	DOLLY		SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						07/16/01			Pair