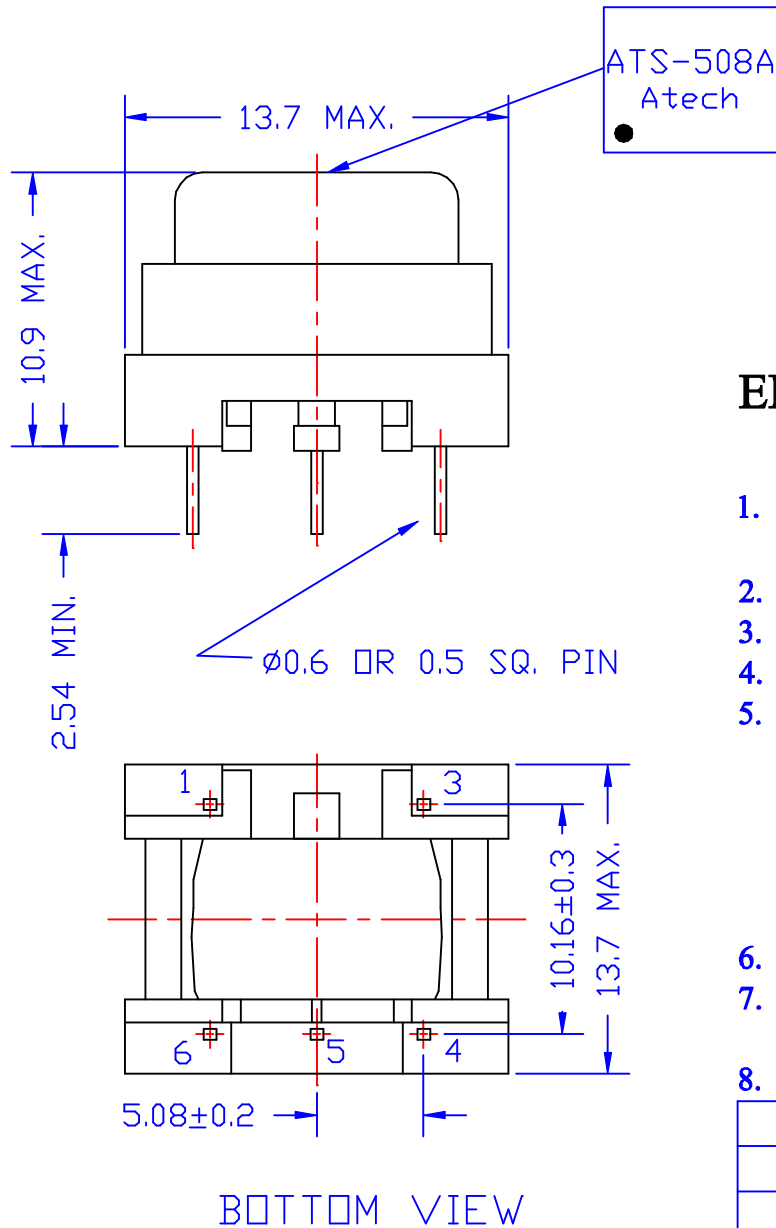


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 3-1 = $69 \text{ OHM} \pm 12\%$ PIN 6-5 = $49 \text{ OHM} \pm 12\%$
PIN 5-4 = $13 \text{ OHM} \pm 12\%$
- INDUCTANCE : (@1 KHZ, 1 Vrms) PIN 6-4 = 0.85 H MIN.
- INSERTION LOSS : (@1 KHZ, 0 dBm, 1-3 W/H 514 OHM LOAD) PIN 6-5 = 1.5 dB MAX.
- FREQ RESP : (@REF 1 KHZ) (@300 HZ) = $\pm 0.25 \text{ dB}$ (@4 KHZ) = $\pm 0.25 \text{ dB}$
- RETURN LOSS : (@REF 600 OHM LOAD) (@300 HZ) = 20 dB MIN.
(@1 KHZ) = 20 dB MIN.
(@4 KHZ) = 18 dB MIN.
(@REF 900 OHM LOAD) (@300 HZ) = 20 dB MIN.
(@1 KHZ) = 20 dB MIN.
(@4 KHZ) = 18 dB MIN.
- THD (@300 HZ, 0 dBm) : PIN 6-5 = -40 dB MAX.
- TURN RATIO (@20 KHZ, 1 Vrms) : PIN 6-4 : 1-3 = $1.225 \pm 1\%$
PIN 6-5 : 1-3 = $1 \pm 1\%$
- HI - POT (@1875 VAC, 1 mA, 2 SEC) PRI - SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 514: 600/900 TRANSFORMER	
							DWG. NO. ATS-508A	
	RELEASE	04/27/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						04/27/01		