

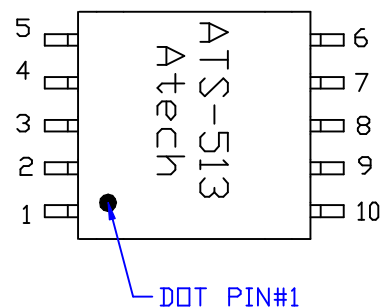
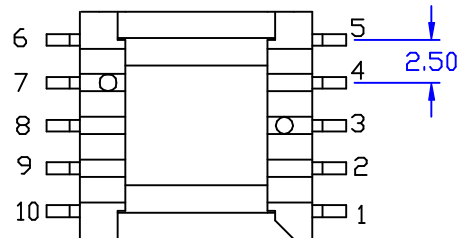
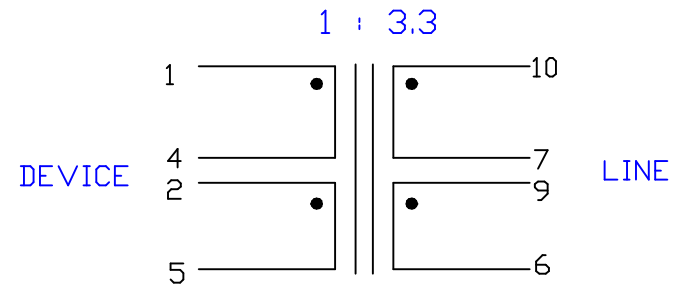



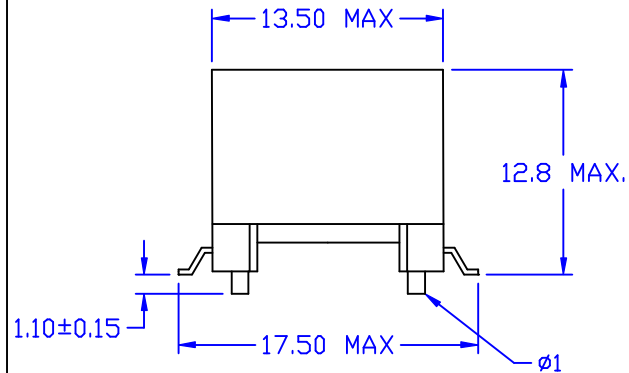

ELECTRICAL CHARACTERISTICS : <FOR 821-00363 COMPATIBLE>

1. D.C.R. : 1-4 = 2-5 = 155m OHM±12%,
10-7 = 9-6 = 566m OHM±12%
2. INDUCTANCE : (<@10KHz, 0.1Vrms,>) 10-6<9-7 SHORT> = 800uH±5%
3. LEAKAGE INDUCTANCE : (<@100KHz, 0.1Vrms,>):
10-6<9-7 1-5 2-4 SHORT> = 17uH MAX.
4. INTERWINDING CAP. (<@10KHz, 0.1Vrms,>):
1-10<2-4 9-7 SHORT> = 50pF MAX.
5. TURN RATIO : (<@1.3MHz, 0.1Vrms,>):
10-6<9-7 SHORT>: 1-5<2-4 SHORT> = 3.3±2%
6. HI-POT (<@ 1875 VAC, 1mA, 1SEC>) PRI-SEC

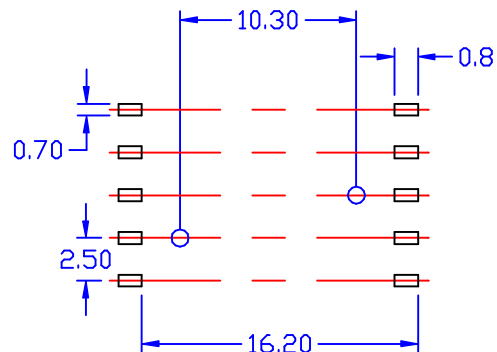

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-513B	
	RELEASE	10/05/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/05/01			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	