
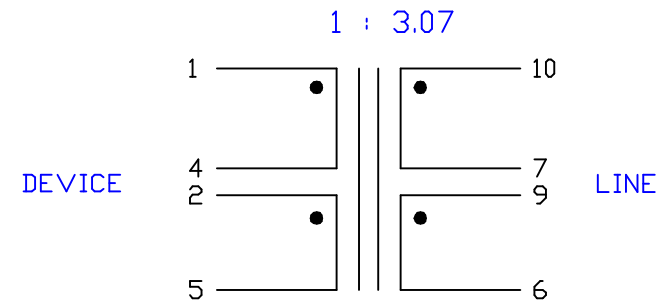
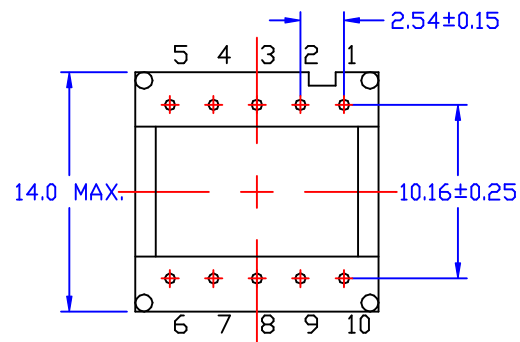
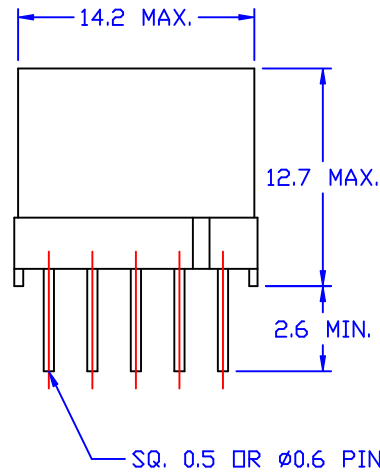


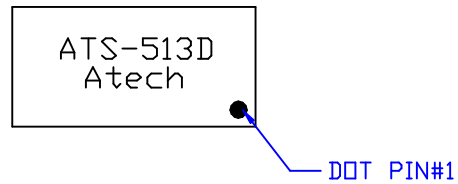

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 2-5 = 162m OHM $\pm$ 12%
PIN 10-7 = 9-6 = 554m OHM $\pm$ 12%
2. INDUCTANCE (@10KHz, 0.1Vrms) : PIN 10-6 (9-7 SHORT) = 800uH $\pm$ 5%
3. LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 10-6 (9-7 1-5 2-4 SHORT) = 17uH MAX.
4. INTERWINDING CAP. (@10KHz, 0.1Vrms) :
PIN 1-10 (2-4 9-7 SHORT) = 50pF MAX.
5. TURN RATIO (@1.3MHz, 0.1Vrms) :
PIN 10-6 (9-7 SHORT) : 1-5 (2-4 SHORT) = 3.07 $\pm$ 2%
6. HI-POT (@1875VAC, 1mA, 1SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	ADSL TRANSFORMER
							DWG. NO.	ATS-513D
	RELEASE	12/07/2001	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
						M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						12/07/01		DRAW <i>Pair</i>