

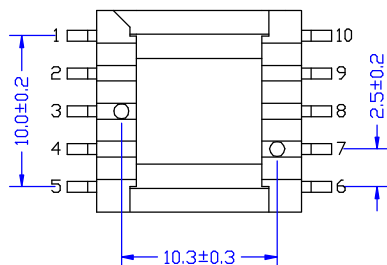



M.F.G.

DOT PIN#1

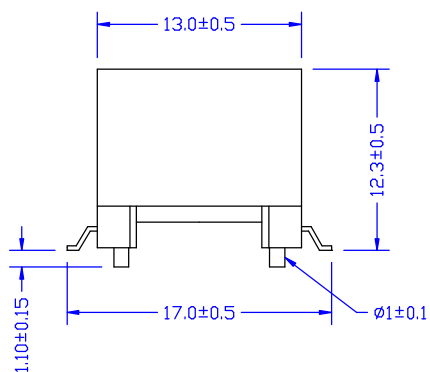

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 162 mΩHM ± 12%
PIN 10-7 = 9-6 = 554 mΩHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-6 <9-7 SHORT> = 800uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-6 <9-7 1-5 2-4 SHORT> = 12 ± 5uH
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 <2-4 7-9 SHORT> = 30 ± 20pF
- TURN RATIO (@1.3MHZ, 0.1Vrms) : PIN 10-6 <7-9 SHORT> : 1-5 <2-4 SHORT> = 3.07 ± 2%
- HI-POT (@1875VAC, 1mA, 1SEC) : PPI-SEC

					Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE ADSL TRANSFORMER	
B	MARKING	04/07/2004	BART	AL	SUEDY	DWG. NO.	ATS-513E
A	TOLERANCES	02/20/2002	DOLLY	JEFF	SUEDY	UNITS: M/M SAFETY	
	RELEASE	01/07/2002	DOLLY	JEFF	SUEDY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1
REVISIONS						01/07/02	DRAW Pair