
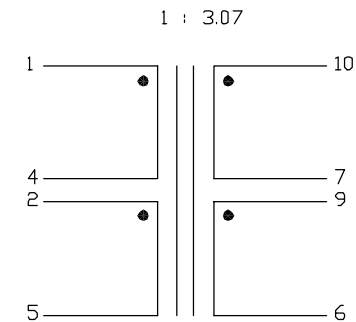
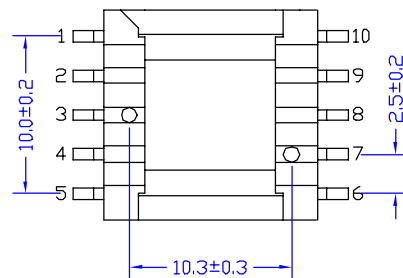

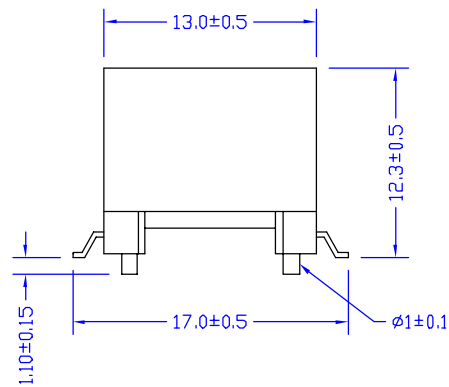




ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 162 mΩHM ± 12%
PIN 10-7 = 9-6 = 554 mΩHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-6 (9-7 SHORT) = 800uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-6 (9-7 1-5 2-4 SHORT) = 12 ± 5uH
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 (2-4 7-9 SHORT) = 30 ± 20pF
- TURN RATIO (@1.3MHZ, 0.1Vrms) : PIN 10-6 (7-9 SHORT) : 1-5 (2-4 SHORT) = 3.07 ± 2%
- HI-POT (@1875VAC, 1mA, 1SEC) : PPI-SEC
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	ADSL TRANSFORMER
								DWG. NO.	ATS-513ER
	RELEASE	09/02/2005	BART	VINCENT	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE		09/02/05	DRAW