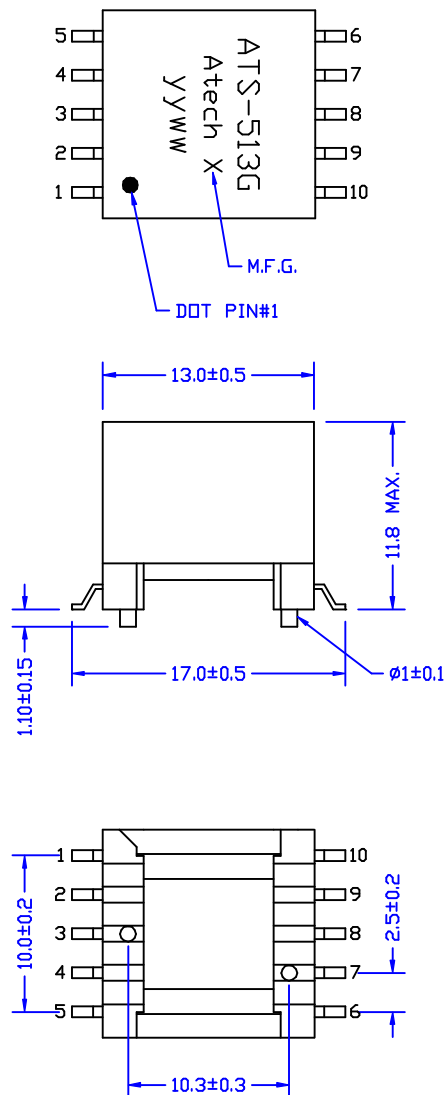


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 226 mΩHM ± 12%
PIN 10-7 = 9-6 = 830 mΩHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 10-6 (9-7 SHORT) = 800uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-6 (9-7 1-5 2-4 SHORT) = 28uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-10 (2-4 9-7 SHORT) = 50 pF MAX.
- TURN RATIO (@1.2MHZ, 0.1Vrms) :
PIN 10-6:1-5(9-7 2-4 SHORT) = 3 ± 2%
- HI-POT (@1875VAC, 1mA, 1SEC) : PRI-SEC

						Atech®		TITLE	ADSL
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:022794-6667 FAX:022794-8004		DWG. NO.	ATS-513G
RELEASE		01/25/2005	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
DESCRIPTION		DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	01/25/05	DRAW	
								Pair	