
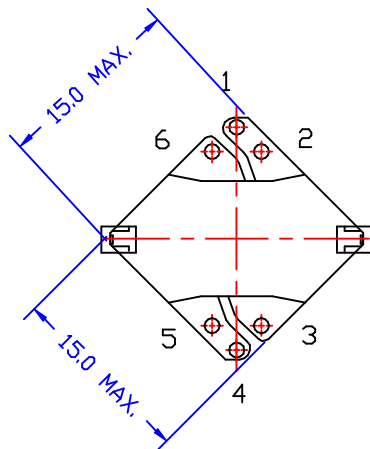

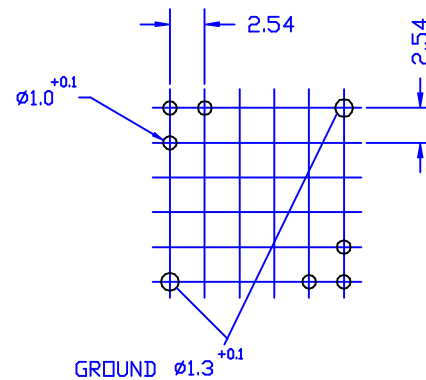


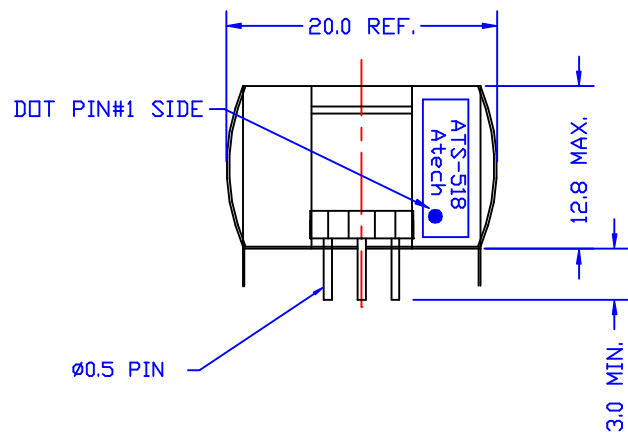

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 6-2 = PIN 3-5 = 2.82 OHM MAX.
2. INDUCTANCE(@1KHZ, 1Vrms) : PIN 6-5(2-3 SHORT) = 10.8mH±5%
(@300mADC) : PIN 6-5(2-3 SHORT) = 9.72mH MIN.
3. TURN RATIO(@150KHZ, 1Vrms) : PIN 6-2 : PIN 3-5 = 1±2%
4. HI-POT(@500VA, 1mA, 1SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE ADSL INDUCTOR	
							DWG. NO. ATS-518	
	RELEASE	04/16/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						04/16/01	SHEET 1 OF 1	
							DRAW <i>Pair</i>	