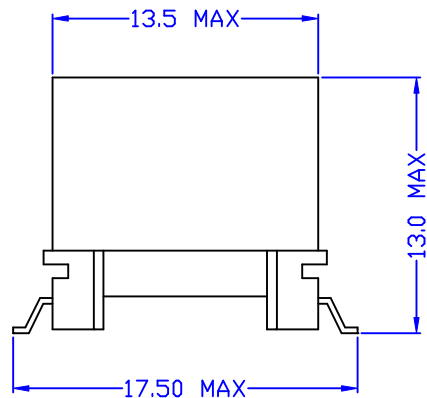
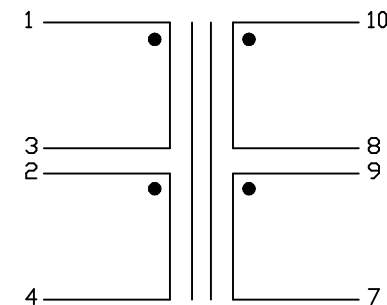
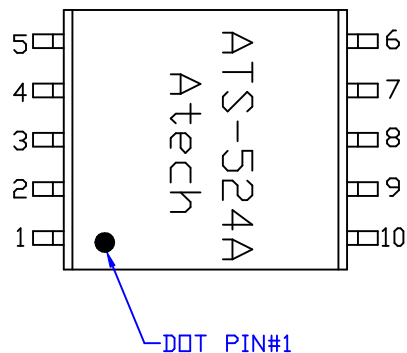


ELECTRICAL CHARACTERISTICS :

(FOR ALCATEL CHIPSET)

1. D.R.C. : PIN 1-3 = 2-4 = $0.58 \Omega \pm 12\%$
PIN 10-8 = 9-7 = $0.59 \Omega \pm 12\%$
2. INDUCTANCE (@10KHZ, 0.1Vrms, W/H 8-9 SHORT) :
PIN 10-7 = $102.4 \mu\text{H} \pm 5\%$
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms, 2-3, 8-9, 10-7 SHORT) :
PIN 1-4 = $6 \mu\text{H} \text{ MAX.}$
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (W/H 2-3, 8-9 SHORT) = $40\text{pF} \text{ MAX.}$
5. TURN RATIO (@250KHZ, 0.1Vrms, 2-3, 9-8 SHORT) :
PIN 1-4 : 10-7 = $1 \pm 1\%$
6. HI-POT (@1875VAC, 1mA, 1SEC) : PRI-SEC
7. RoHS COMPLANCE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-524AR	
	RELEASE	03/22/2006	PAIR	EUGENE	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/22/06			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	