
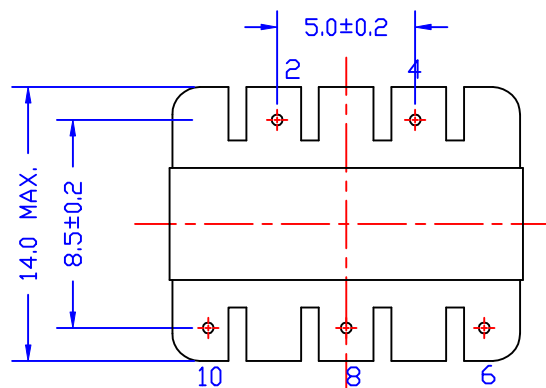
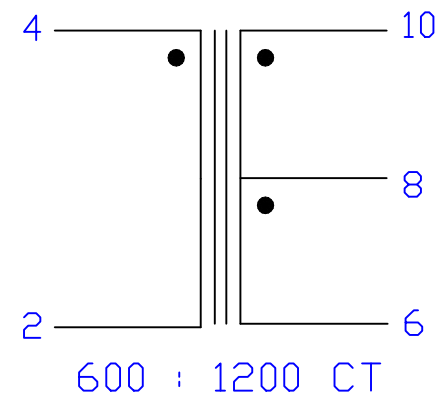


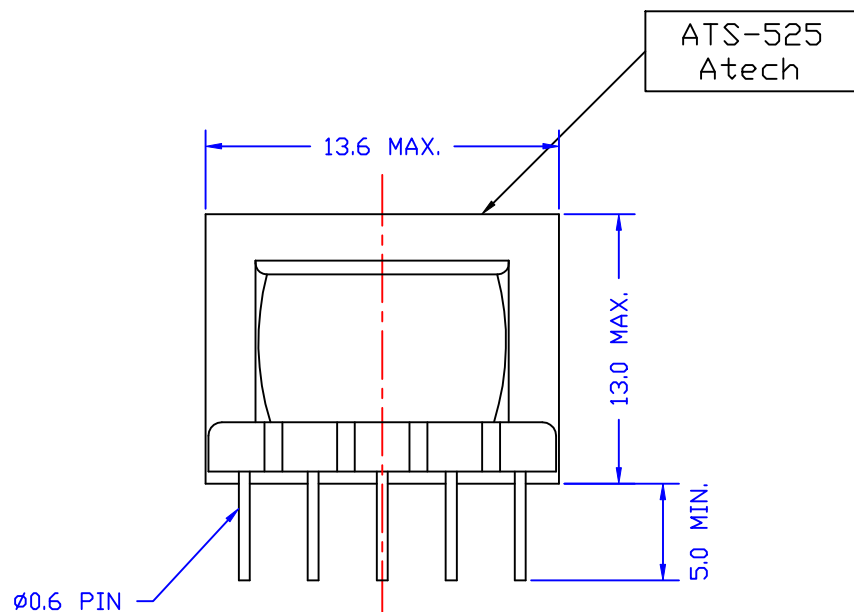

ELECTRICAL CHARACTERISTICS :

- DCR. : PIN 2-4 = 73 OHM $\pm 12\%$
PIN 6-8 = 8-10 = 71 OHM $\pm 12\%$
- INDUCTANCE (@1KHz, 1 Vrms) PIN 2-4 = 630 mH MIN.
- INSERTION LOSS (@1 KHZ, 0 dBm 10-6 W/H 1200 OHM) 2-4 = 2 dB MAX.
- FREQ RESP (REF 1 KHZ) @300 HZ = ± 0.5 dB
@4 KHZ = ± 0.5 dB
- TURN RATIO (@10 KHz, 1Vrms) PIN 10-6 : PIN 8-6 = $2 \pm 1\%$
PIN 10-6 : PIN 4-2 = $1.5 \pm 1\%$
- HI-POT (@1875 VAC, 1 mA, 2 SEC) PRI-SEC
- RETURN LOSS (REF 600 OHM) : @300 HZ = 10 dB MIN.
@1KHZ = 15 dB MIN.
@4K HZ = 15 dB MIN.

					Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600: 1200CT TRANSFORMER	
B	SPEC.	08/06/2001	DOLLY			SUEDY	DWG. NO. ATS-525
A	SPEC.	06/07/2001	DOLLY		SUEDY		
	RELEASE	05/28/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	
REVISIONS						05/28/01	SHEET 1 OF 1 DRAW <i>Pair</i>