

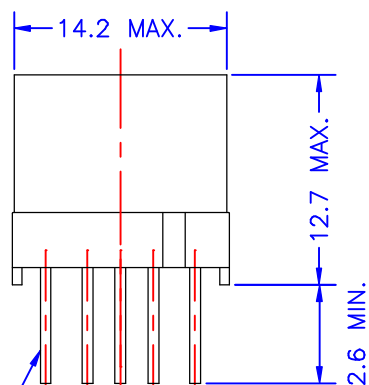
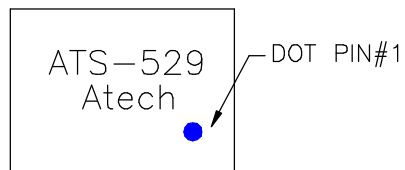


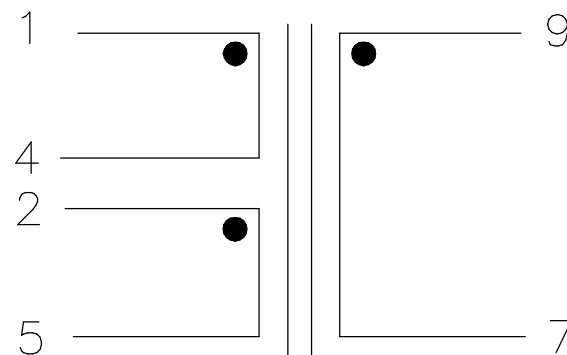

SQ. 0.5 OR Ø0.6 PIN

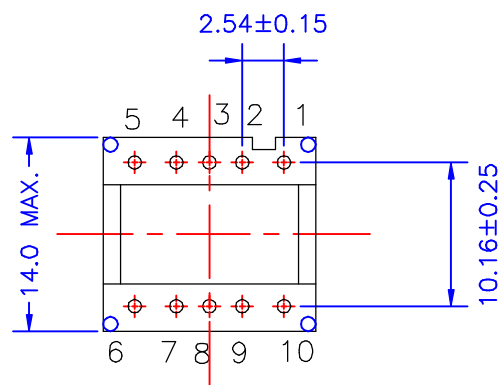

135 : 32

ELECTRICAL CHARACTERISTICS : (35548 COMPATIBLE)

- PIN 1-5 (2-4 SHORT) = 2.5 OHM MAX. PIN 9-7 = 1.4 OHM MAX.
- INDUCTANCE (@10 KHZ , 0.1 Vrms) : PIN 1-5 (W/H 2-4 SHORT) = 2 mH $\pm$ 6%.
- LEAKAGE INDUCTANCE (@100 KHZ , 0.1 Vrms) :
PIN 1-5 (W/H 2-4, 9-7 SHORT) = 9.6 uH MAX.
- RETURN LOSS (@40 KHZ - 300 KHZ) : 16.5 dB MIN.
- INSERTION LOSS (@40 KHZ, 0.1 Vrms, 2-4 SHORT, 9-7 W/H 32 OHM)
1-5 = 0.5 dB MAX.
- FREQ. RESP (@40 KHZ - 200 KHZ) : $\pm$ 0.1 dB
- TURN RATIO (@400 KHZ, 1 Vrms) 1-5 (2-4 SHORT) : 9-7 = 2 $\pm$ 1%
- HI-POT (@2050 VAC, 1 mA, 1 SEC) 1-9 (2-4 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:(02)788-1958 FAX:(02)788-1960		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-529	
	RELEASE	06/02 /2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/02/01		DRAW <i>Pair</i>	
REVISIONS									