
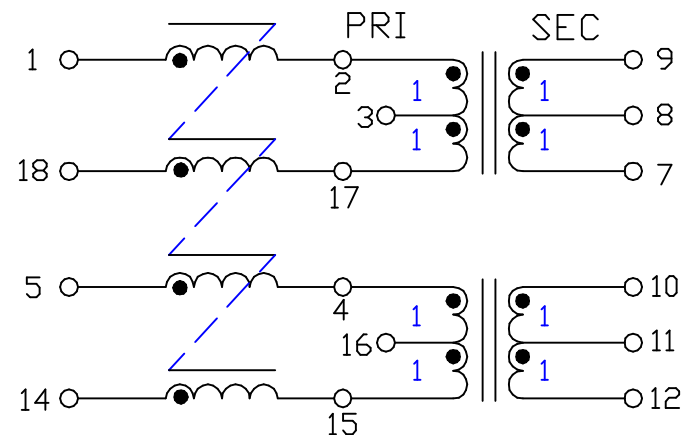
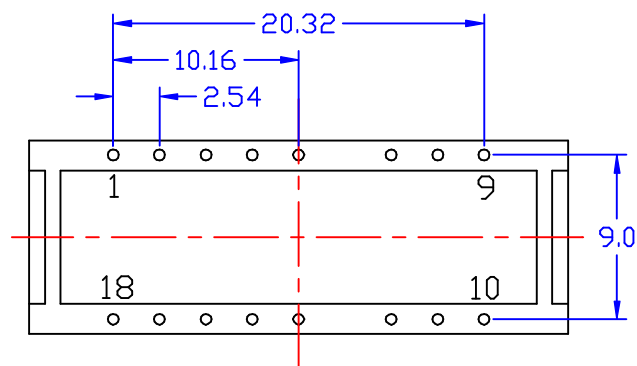
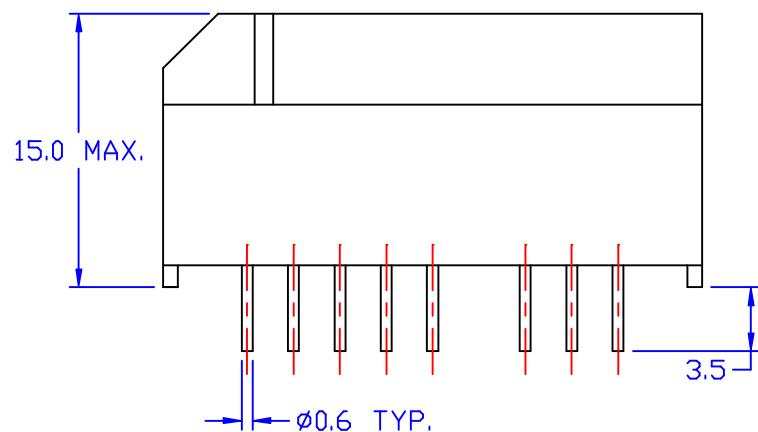


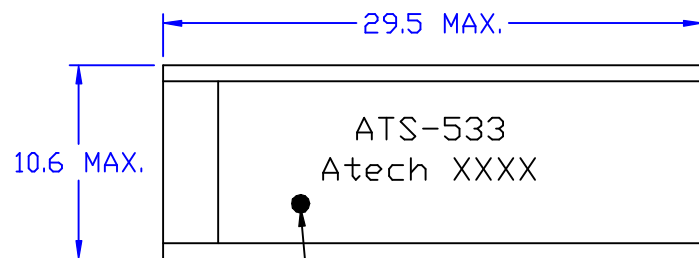

ELECTRICAL CHARACTERISTICS : (T60407-L5051-X017 COMPATIBLE)

- D.C.R. : 2-17 = 4-15 = 2.5 OHM MAX.
9-7 = 10-12 = 2.5 OHM MAX.
1-2 = 17-18 = 4-5 = 14-15 = 1.3 OHM MAX.
- INDUCTANCE : (@10 KHZ, 0.1 Vrms) 2-17 = 4-15 = 30 mH MIN.
1-2 = 17-18 = 4-5 = 14-15 = 5 mH +50/-30%.
- LEAKAGE INDUCTANCE : (@100 KHZ, 0.1 Vrms, 9-7, 10-12 SHORT)
2-17 = 4-15 = 5 uH MAX.
- CHOKE LEAKAGE INDUCTANCE : (@100 KHZ, 0.1 Vrms, 17-18, 14-15 SHORT)
1-2 = 4-5 = 0.6 uH MAX.
- INTERWINDING CAP. : (@10 KHZ, 0.1 Vrms) 1-9 = 5-10 = 150 pF MAX.
- URNS RATIO : (@15 KHZ, 0.1 Vrms) 9-7 : 2-17 = 1 ± 1%
10-12 : 4-15 = 1 ± 1%
1-2 : 18-17 = 5-4 : 14-15 = 1 ± 1%
- HI-POT : 2-9, 4-10 (@1500 Vrms, 1mA 2SEC.)
3-16 (@500 Vrms, 1mA, 2SEC, 1-9, 5-10 SHORT)

						Atech®		TITLE ISDN SD MODULE	
						Atech Technology Co., Ltd.		DWG. NO. ATS-533	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
RELEASE		06/19/2001	DOLLY	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW Pair
REVISIONS						06/19/01			