

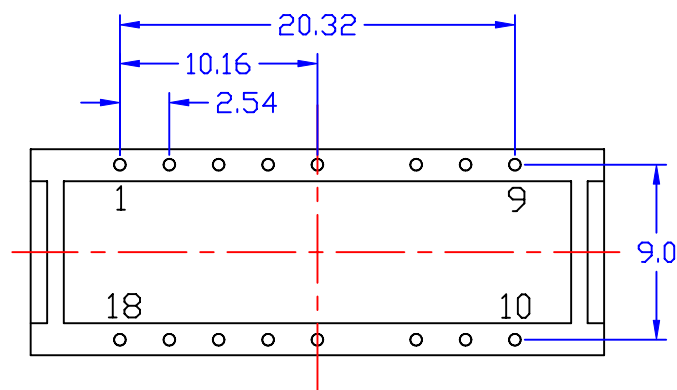
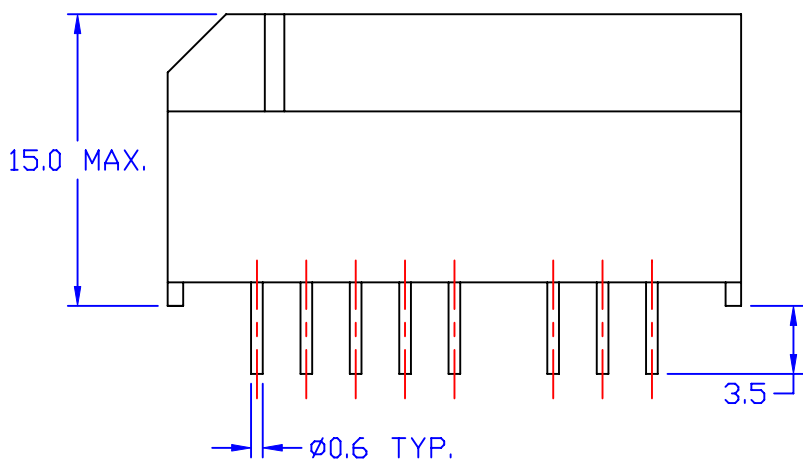


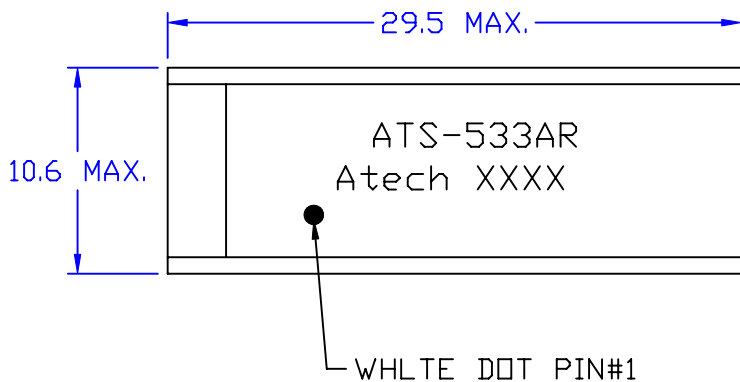

TOLERANCE : XX.X ±0.25
0.XX ±0.05

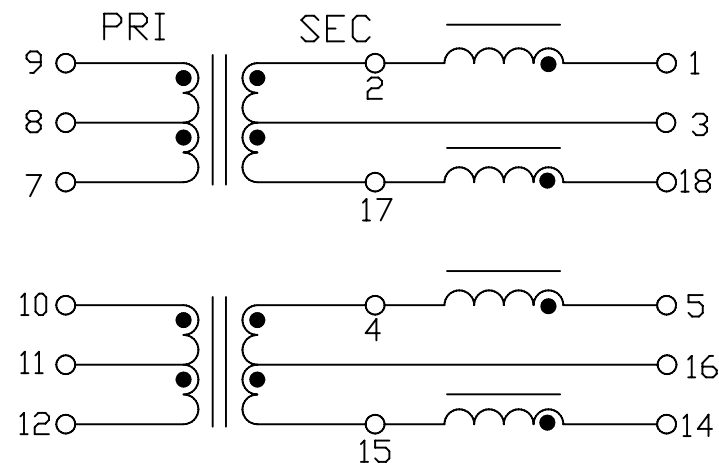

ELECTRICAL CHARACTERISTICS :

- D.C.R. : 7-9,10-12,2-17,4-15 = 4.0 OHM MAX.
1-2 = 17-18 , 4-5 = 14-15 = 1.5 OHM MAX.
- DCL(@10KHZ,0.1V) : 2-17,4-15 = 30mH MIN.
1-2 = 17-18 = 4-5 = 14-15 = 4.7mH MIN.
- CW/W : 3-8/11-16 = 150pF MAX.
1-5/18-14 = 100pF MAX.
- TURNS RATIO : 2-17 : 9-7 , 4-15 : 10-12 = 1:1±1%
- L.L(@100KHZ,0.1V) : 2-17(7-9 SHORT) = 5.0uH MAX.
4-15(10-12 SHORT) = 5.0uH MAX.
- HI-POT(1mA 2SEC) : PRI-SEC = 1500V
- RoHS COMPLIANT

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ISDN MODULES TRANSFORMER	
								DWG. NO. ATS-533AR	
	RELEASE	07/16/2007	DOLLY		SUEDY	UNITS: M/M		SAFETY	SHEET1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						07/16/07			Pair