
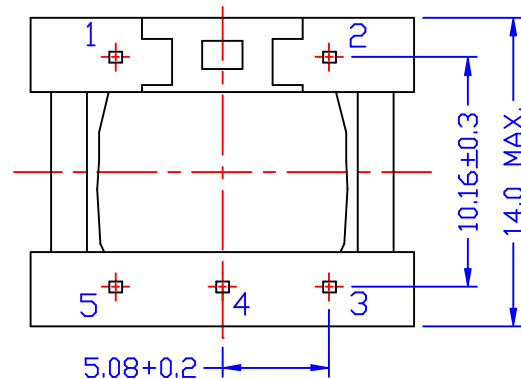
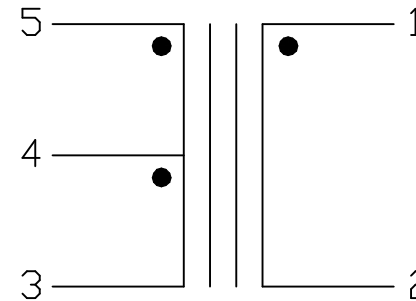


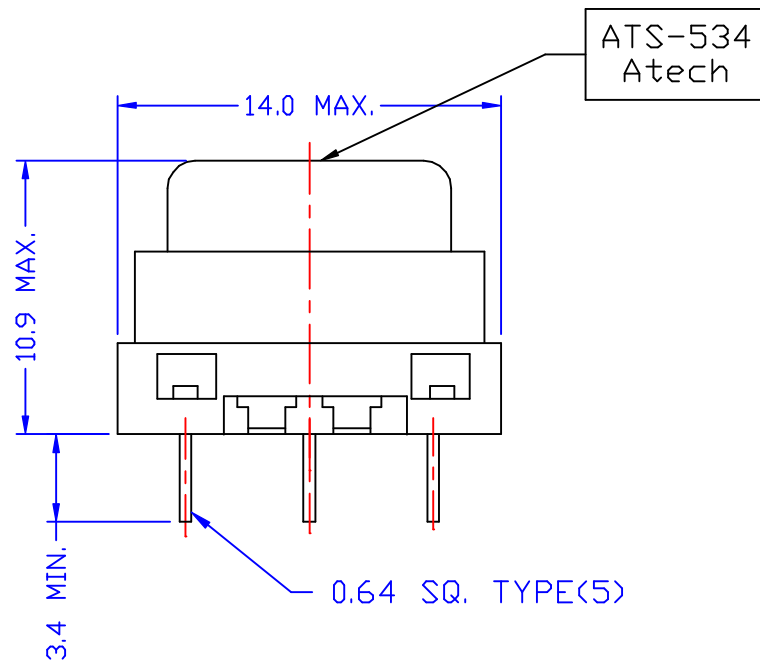

BOTTOM VIEW

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-5 = 4.3 OHM MAX. PIN 1-2 = 29 OHM MAX.
2. INDUCTANCE : (@300HZ, 1Vrms) 1-2 = 0.9H $\pm$ 20%
3. INSERTION LOSS : (@900HZ, 0dBm 3-5 W/H 97.4 OHM) 1-2 = 2.5 dB MAX.
4. FREQ. RESP. : (@REF. 900HZ) @300HZ = $\pm$ 0.5 dB
@3.4KHZ = $\pm$ 0.3 dB
5. RETURN LOSS : (@REF 600 OHM)
@300HZ = 16 dB MIN.
@900HZ = 16 dB MIN.
@3.4KHZ = 16 dB MIN.
6. TURN RATIO : (@80KHZ, 1Vrms) 1-2 : 5-3 = 2.46 $\pm$ 1%
7. INSULATION RESISTANCE : (@100VDC) = 500M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE 600 : 97.4CT TRANSFORMER	
							DWG. NO. ATS-534	
	RELEASE	06/29/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						06/29/01		Pair