
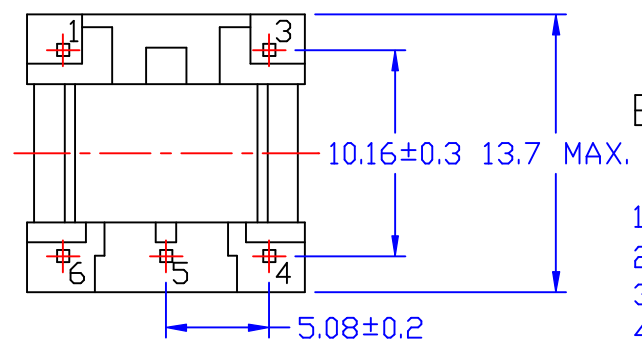
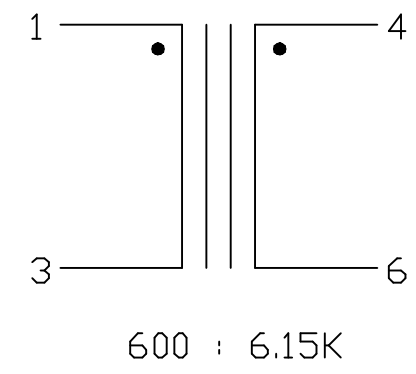


ATS-537
Atech

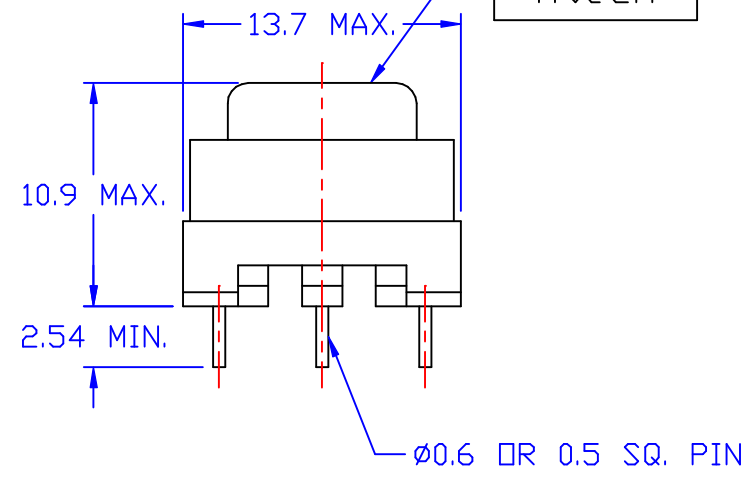

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 20 OHM $\pm$ 12% PIN 4-6 = 270 OHM $\pm$ 12%
2. INDUCTANCE : (<@1KHZ, 1Vrms) 1-3 = 440 mH MIN.
3. INSERTION LOSS : (<@1KHZ, 0dBm 4-6 W/H 6.15K OHM) 1-3 = 1.2 dB MAX.
4. FREQ. RESP : (<@REF 1KHZ) (<@300HZ) = $\pm$ 0.5 dB
(<@4KHZ) = $\pm$ 0.5 dB
5. RETURN LOSS : (<@REF 600 OHM) (<@1KHZ) = 25 dB MIN.
6. TURN RATIO : (<@20KHZ, 1Vrms) 4-6 : 1-3 = 3.2 $\pm$ 1%
7. HI-POT (<@1250VAC, 1mA, 2SEC) 1-4

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 6.15K TRANSFORMER	
								DWG. NO. ATS-537	
	RELEASE	07/25/2001	DOLLY		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 07/25/01			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	