
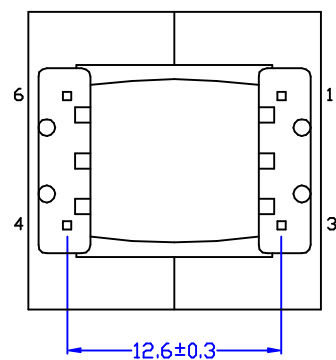
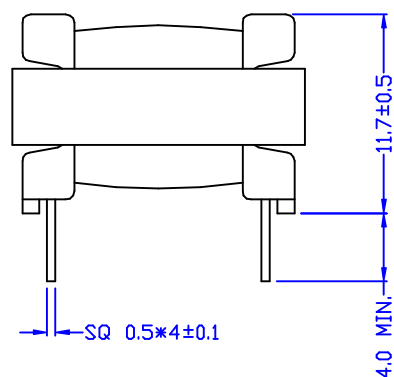
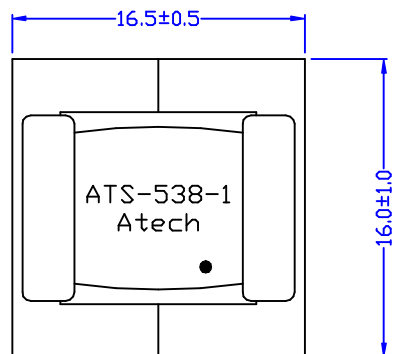


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 5.0 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 24mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 23.4mH $\pm$ 7%
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@109KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

						Atech®		TITLE	INDUCTOR
						Atech Technology Co., Ltd.		FOR	SPLITTER
						TEL:022794-6667 FAX:022794-8004		DWG. NO.	ATS-538-1
						RELEASE	12/23/2004	BART	MICHAEL SUE DY
						UNITS:	M/M	SAFETY	
						DATE	12/23/04	SHEET 1 OF 1	
						REVISIONS		DRAW	Pair