
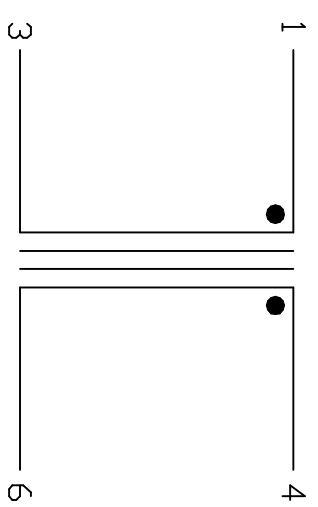
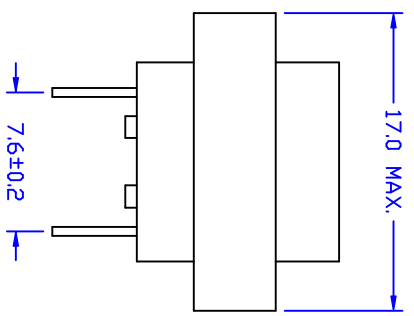


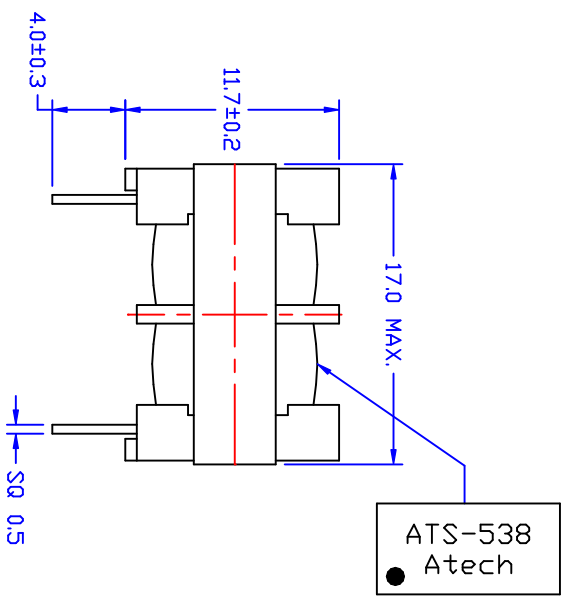

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 5.6 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : 1-6 (3-4 SHORT) = 24 mH ± 5%
(@100mADC) : 1-6 (3-4 SHORT) = 21.6 mH MIN.
3. TURN RATIO (@109KHZ, 1Vrms) : 1-3 : 4-6 = 1 ± 1%.
4. HI-POT : (@500VAC, 1mA, 2SEC) 1-4

							Atech Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004 TITLE INDUCTOR FOR SPLITTER DWG. NO. ATS-538		
A	TURN RATIO	08/09 /E001	DOLLY			SUEBY	UNITS:	SAFETY	
	RELEASE	08/02 /E001	DOLLY			SUEBY	M/M		SHEET 1 OF 1
ND:	DESCRIPTION	DATE	BY	CHK	APPD		DATE		DRAW <i>Pair</i>
REVISIONS							08/02/01		