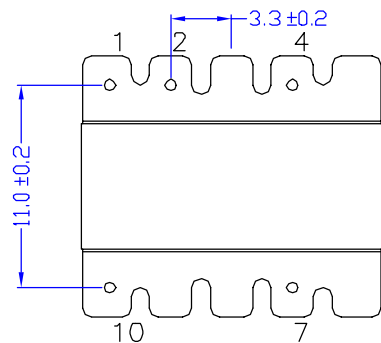
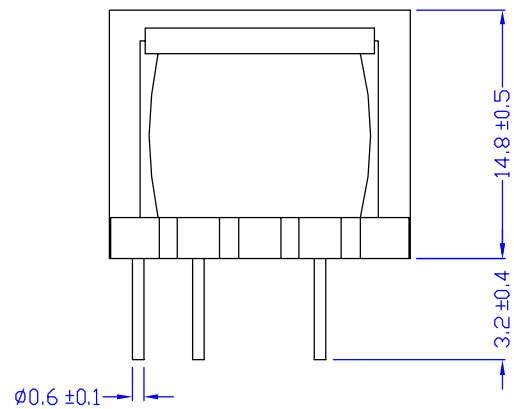
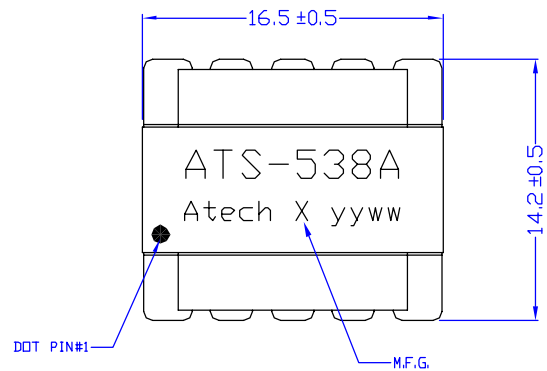


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 7-10 = $4.25 \Omega \pm 12\%$
- INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-10 (4-7 SHORT) = $24\text{mH} \pm 5\%$
(@100mADC) : PIN 1-10 (4-7 SHORT) = $24\text{mH} \pm 10\%$
- TURN RATIO (@25KHZ, 1Vrms) : PIN 1-4 : PIN 7-10 = $1 \pm 1\%$
- HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-7
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE INDUCTOR FOR C/O SPLITTER	
								DWG. NO. ATS-538AR	
	RELEASE	09/02/2005	BART	VINCEN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/02/05			
REVISIONS								DRAW <i>Pair</i>	