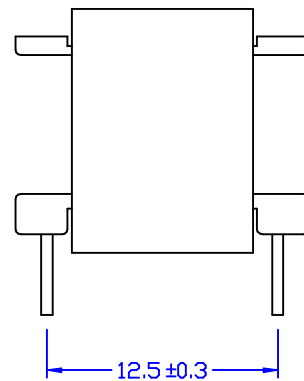
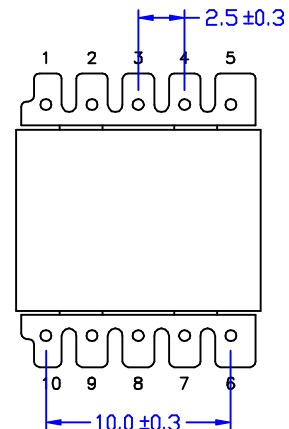
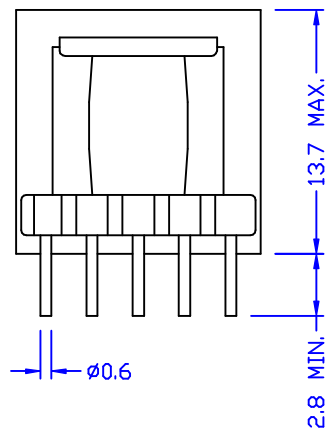
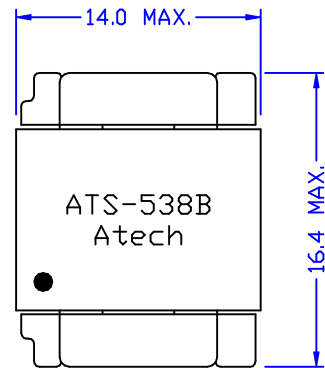


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-5 = 6-10 = 5.43 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-10 (5-6 SHORT) = 24mH ± 5%
(@100mADC MIN.) : PIN 1-10 (5-6 SHORT) = 21.6mH MIN.
3. INDUCTANCE BAL. (@1KHZ, 1Vrms) : PIN 1-5 : PIN 6-10 = 1 ± 1%
4. TURN RATIO (@180KHZ, 1Vrms) : PIN 1-5 : PIN 6-10 = 1 ± 1.5%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE INDUCTOR FOR SPLITTER	
								DWG. NO. ATS-538B	
	RELEASE	04/19/2002	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	DRAW <i>Pair</i>
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						04/19/02			