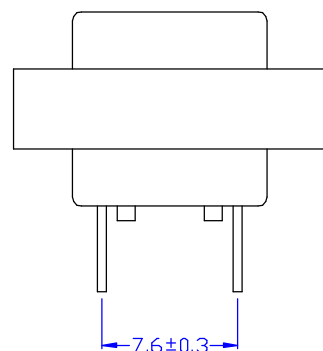
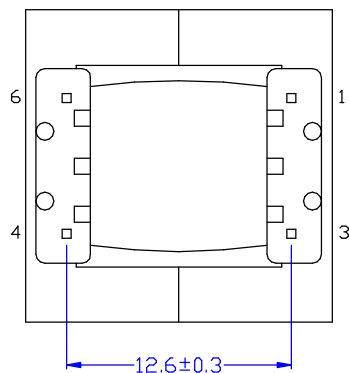
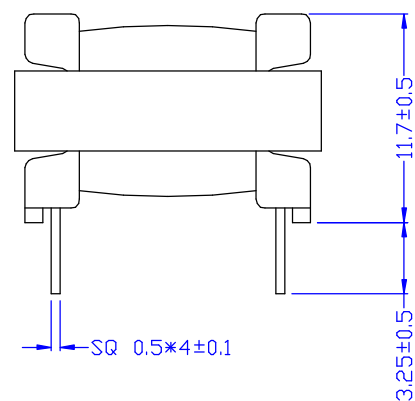
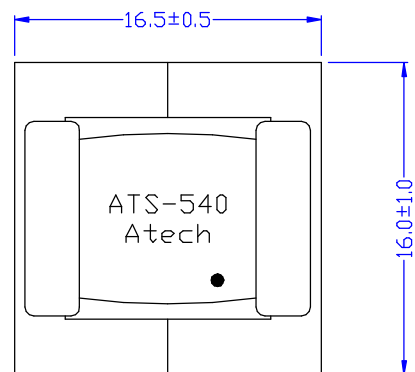


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 1.7 Ω HM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 (3-4 SHORT) = 12mH $\pm$ 5%
PIN 1-3 = PIN 4-6 = 3mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 11.7mH $\pm$ 7%
(@10KHZ, 1Vrms) : PIN 1-3 = PIN 4-6 = 2.95mH TYP.
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@165KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

D	L = 3mH	08/06/2003	RORY	SIMON	SUEDY	Atech Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	INDUCTOR FOR SPLITTER
C	BOBBIN	05/22/2002	DOLLY	JEFF	SUEDY		DWG. NO.	ATS-540
B	DCR ; L ; 17.0	01/29/2002	DOLLY	JEFF	SUEDY			
	RELEASE	08/13/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						08/13/01		Pair