
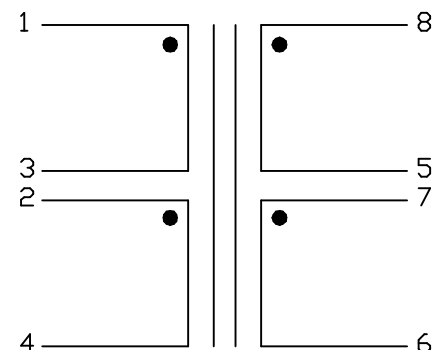
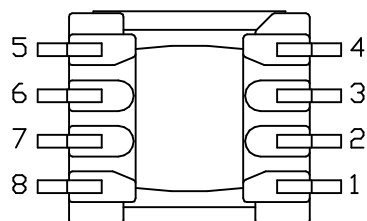

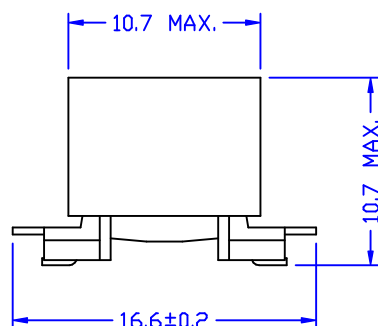


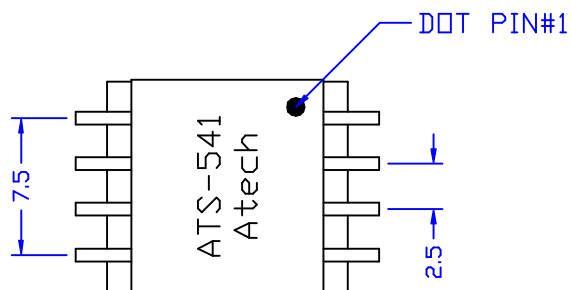

ELECTRICAL CHARACTERISTICS : <51296R COMPATIBLE>

- DCR : PIN 7-6 = 0.34 Ω HM $\pm$ 12%
PIN 1-3 = 2-4 = 0.93 Ω HM $\pm$ 12%
PIN 8-5 = 0.475 Ω HM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 <W/H 2-3 SHORT> = 171uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 <W/H 2-3, 7-5, 8-6 SHORT> = 11uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-8 <2-3, 5-7 SHORT> = 30pF MAX.
- TURN RATIO (@2MHZ, 1Vrms) :
PIN 1-4 <2-3 SHORT> : PIN 8-6 <7-5 SHORT> = 2 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-8 <2-3, 7-5 SHORT>

						Atech [®]		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-541	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
A	EP10	11/13/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	08/21/2001	DOLLY	CPLIU	SUEDY			SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						08/21/01		Pair	