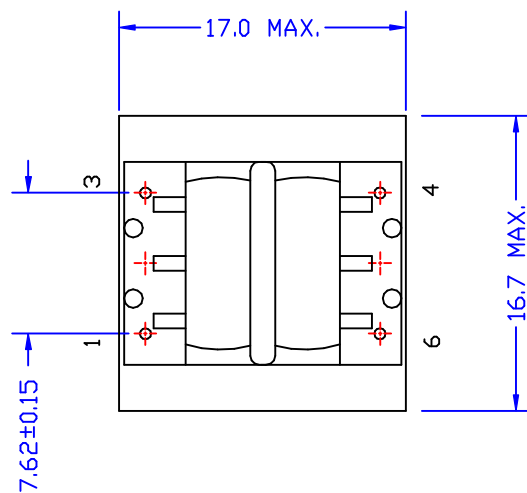
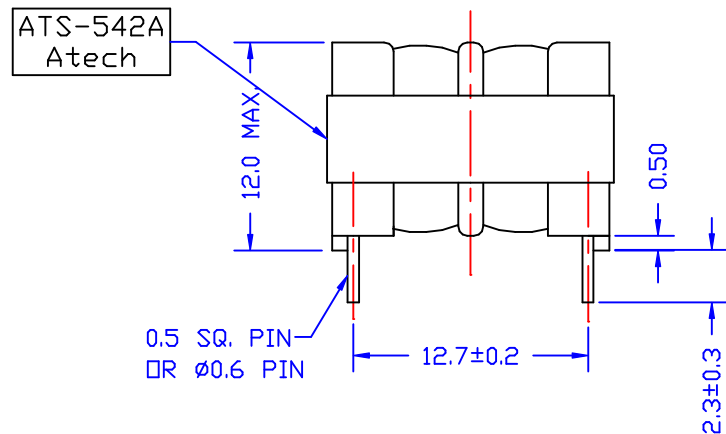


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 0.54 OHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-3 = 5mH MIN.
3. TURN RATIO (@1KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 ± 1%
4. HI-POT (@2000VAC, 1mA, 1min) : PIN 1-6

						Atech®		TITLE
						Atech Technology Co. Ltd.		COMMON CHOKE
						TEL:022794-6667 FAX:022794-8804		DWG. NO.
A	17.0 & 16.7	01/16 /2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		ATS-542A
	RELEASE	08/31 /2001	DOLLY	CPLIU	SUEDY	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						08/31/01		Pair